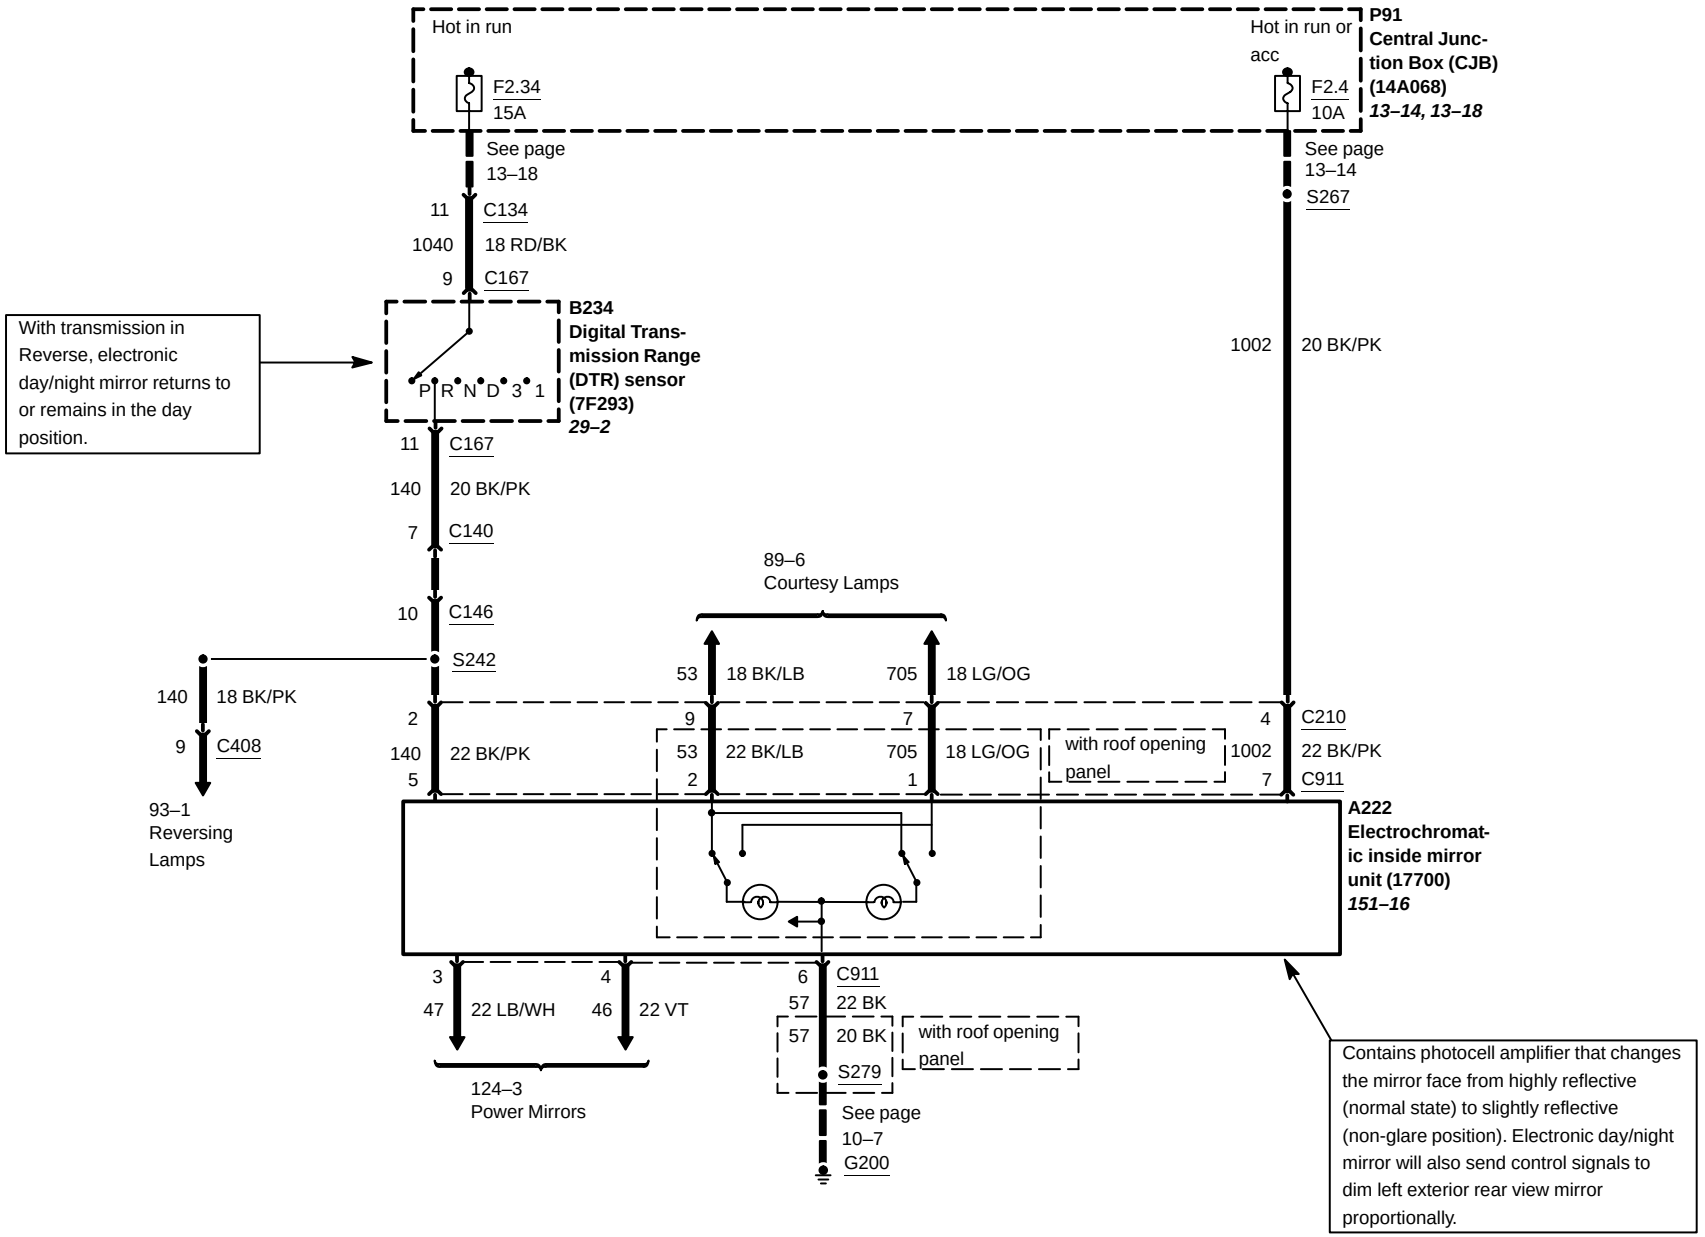
Hot in run
F2.34
15A
Hot in run or acc
F2.4
10A
P91
Central Junction Box (CJB)
(14A068)
13–14, 13–18
See page 13–18
See page 13–14
S267
11
C134
1040
18 RD/BK
9
C167
1002
20 BK/PK
With transmission in Reverse, electronic day/night mirror returns to or remains in the day position.
B234
Digital Transmission Range (DTR) sensor
(7F293)
29–2
P R N D 3 1
11
C167
140
20 BK/PK
7
C140
89–6
Courtesy Lamps
10
C146
S242
53
18 BK/LB
705
18 LG/OG
140
18 BK/PK
9
C408
2
9
7
4
C210
140
22 BK/PK
53
22 BK/LB
705
18 LG/OG
with roof opening panel
1002
22 BK/PK
5
2
1
7
C911
93–1
Reversing Lamps
A222
Electrochromatic inside mirror unit (17700)
151–16
3
4
6
C911
47
22 LB/WH
46
22 VT
57
22 BK
57
20 BK
with roof opening panel
S279
124–3
Power Mirrors
See page 10–7
G200
Contains photocell amplifier that changes the mirror face from highly reflective (normal state) to slightly reflective (non-glare position). Electronic day/night mirror will also send control signals to dim left exterior rear view mirror proportionally.