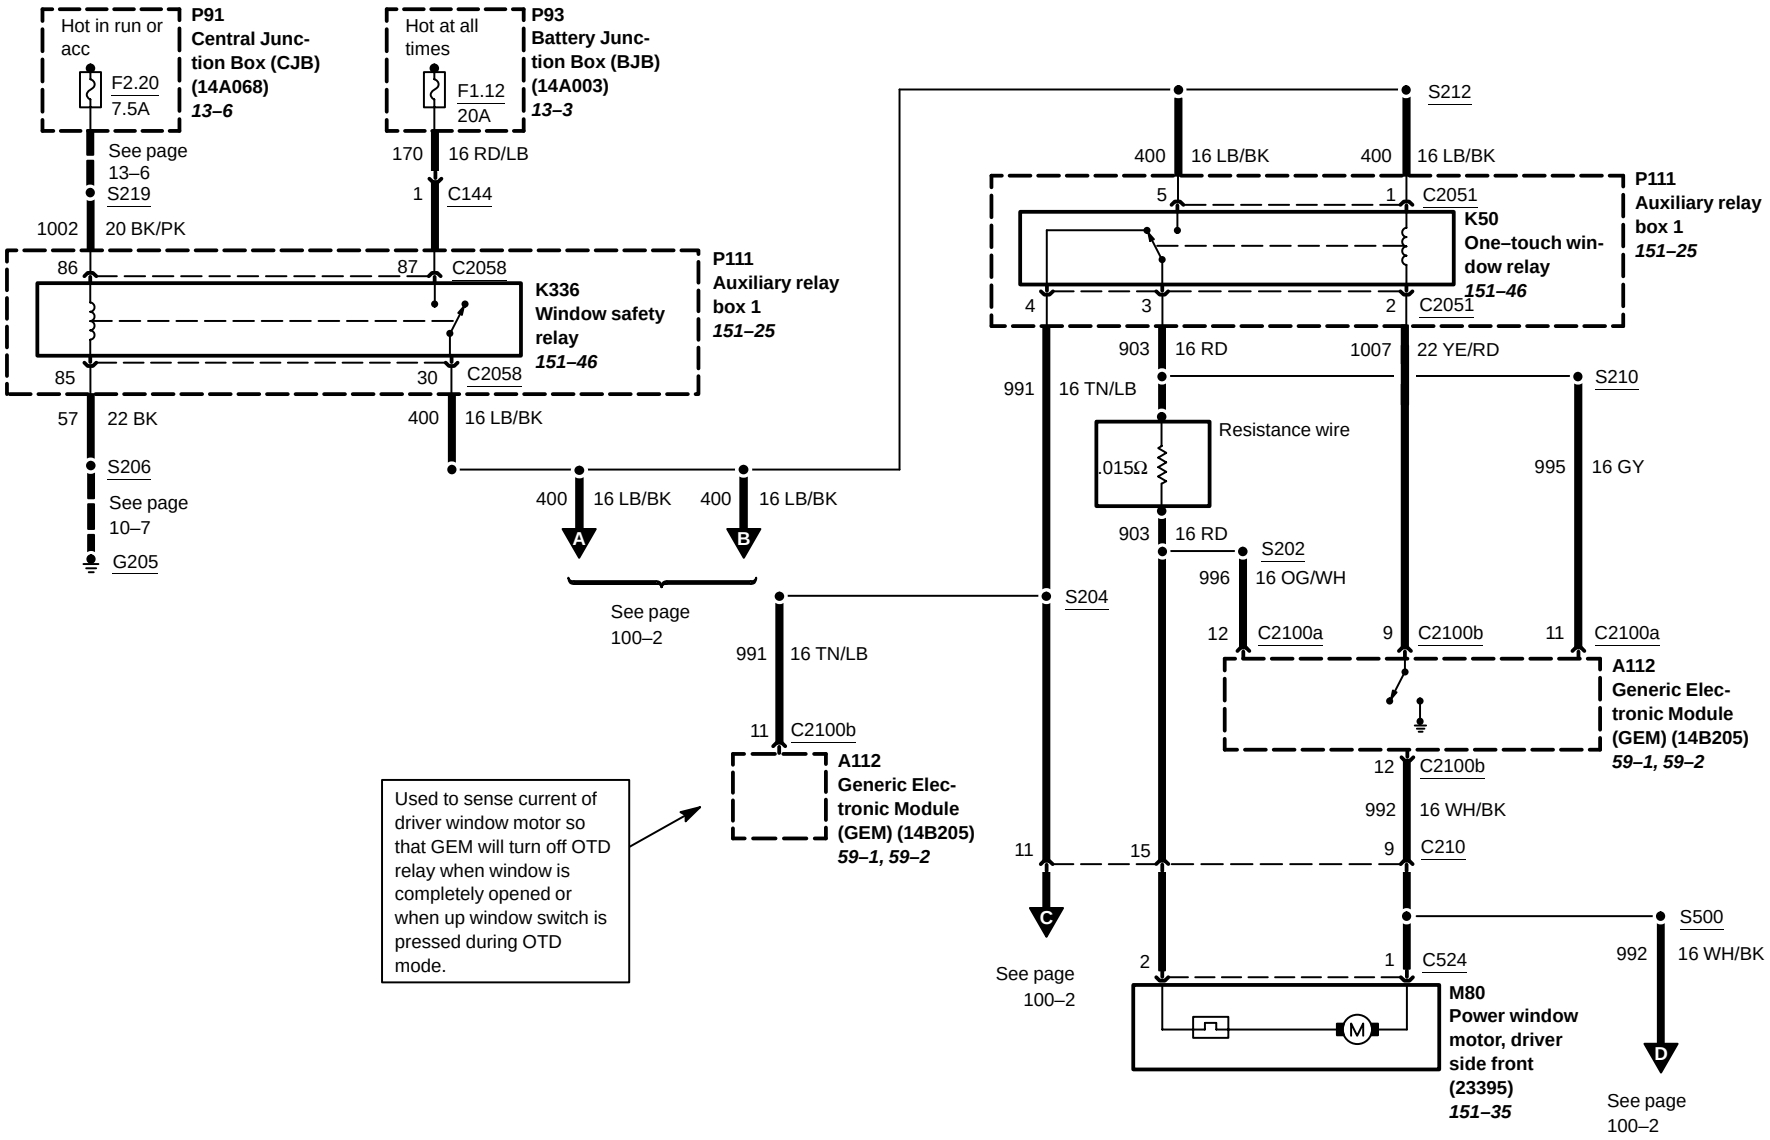
Hot in run or acc
F2.20
7.5A
P91
Central Junction Box (CJB)
(14A068)
13–6
Hot at all times
F1.12
20A
P93
Battery Junction Box (BJB)
(14A003)
13–3
See page 13–6
S219
1002
20 BK/PK
170
16 RD/LB
1
C144
86
87
C2058
K336
Window safety relay
151–46
P111
Auxiliary relay box 1
151–25
85
30
C2058
57
22 BK
400
16 LB/BK
S206
See page 10–7
G205
400
16 LB/BK
400
16 LB/BK
A
B
See page 100–2
S212
400
16 LB/BK
400
16 LB/BK
5
1
C2051
K50
One–touch window relay
151–46
P111
Auxiliary relay box 1
151–25
4
3
2
C2051
903
16 RD
1007
22 YE/RD
991
16 TN/LB
S210
Resistance wire
.015Ω
995
16 GY
903
16 RD
S202
996
16 OG/WH
S204
12
C2100a
9
C2100b
11
C2100a
A112
Generic Electronic Module (GEM) (14B205)
59–1, 59–2
991
16 TN/LB
11
C2100b
A112
Generic Electronic Module (GEM) (14B205)
59–1, 59–2
12
C2100b
992
16 WH/BK
11
15
9
C210
C
See page 100–2
2
1
C524
M80
Power window motor, driver side front (23395)
151–35
S500
992
16 WH/BK
D
See page 100–2
Used to sense current of driver window motor so that GEM will turn off OTD relay when window is completely opened or when up window switch is pressed during OTD mode.