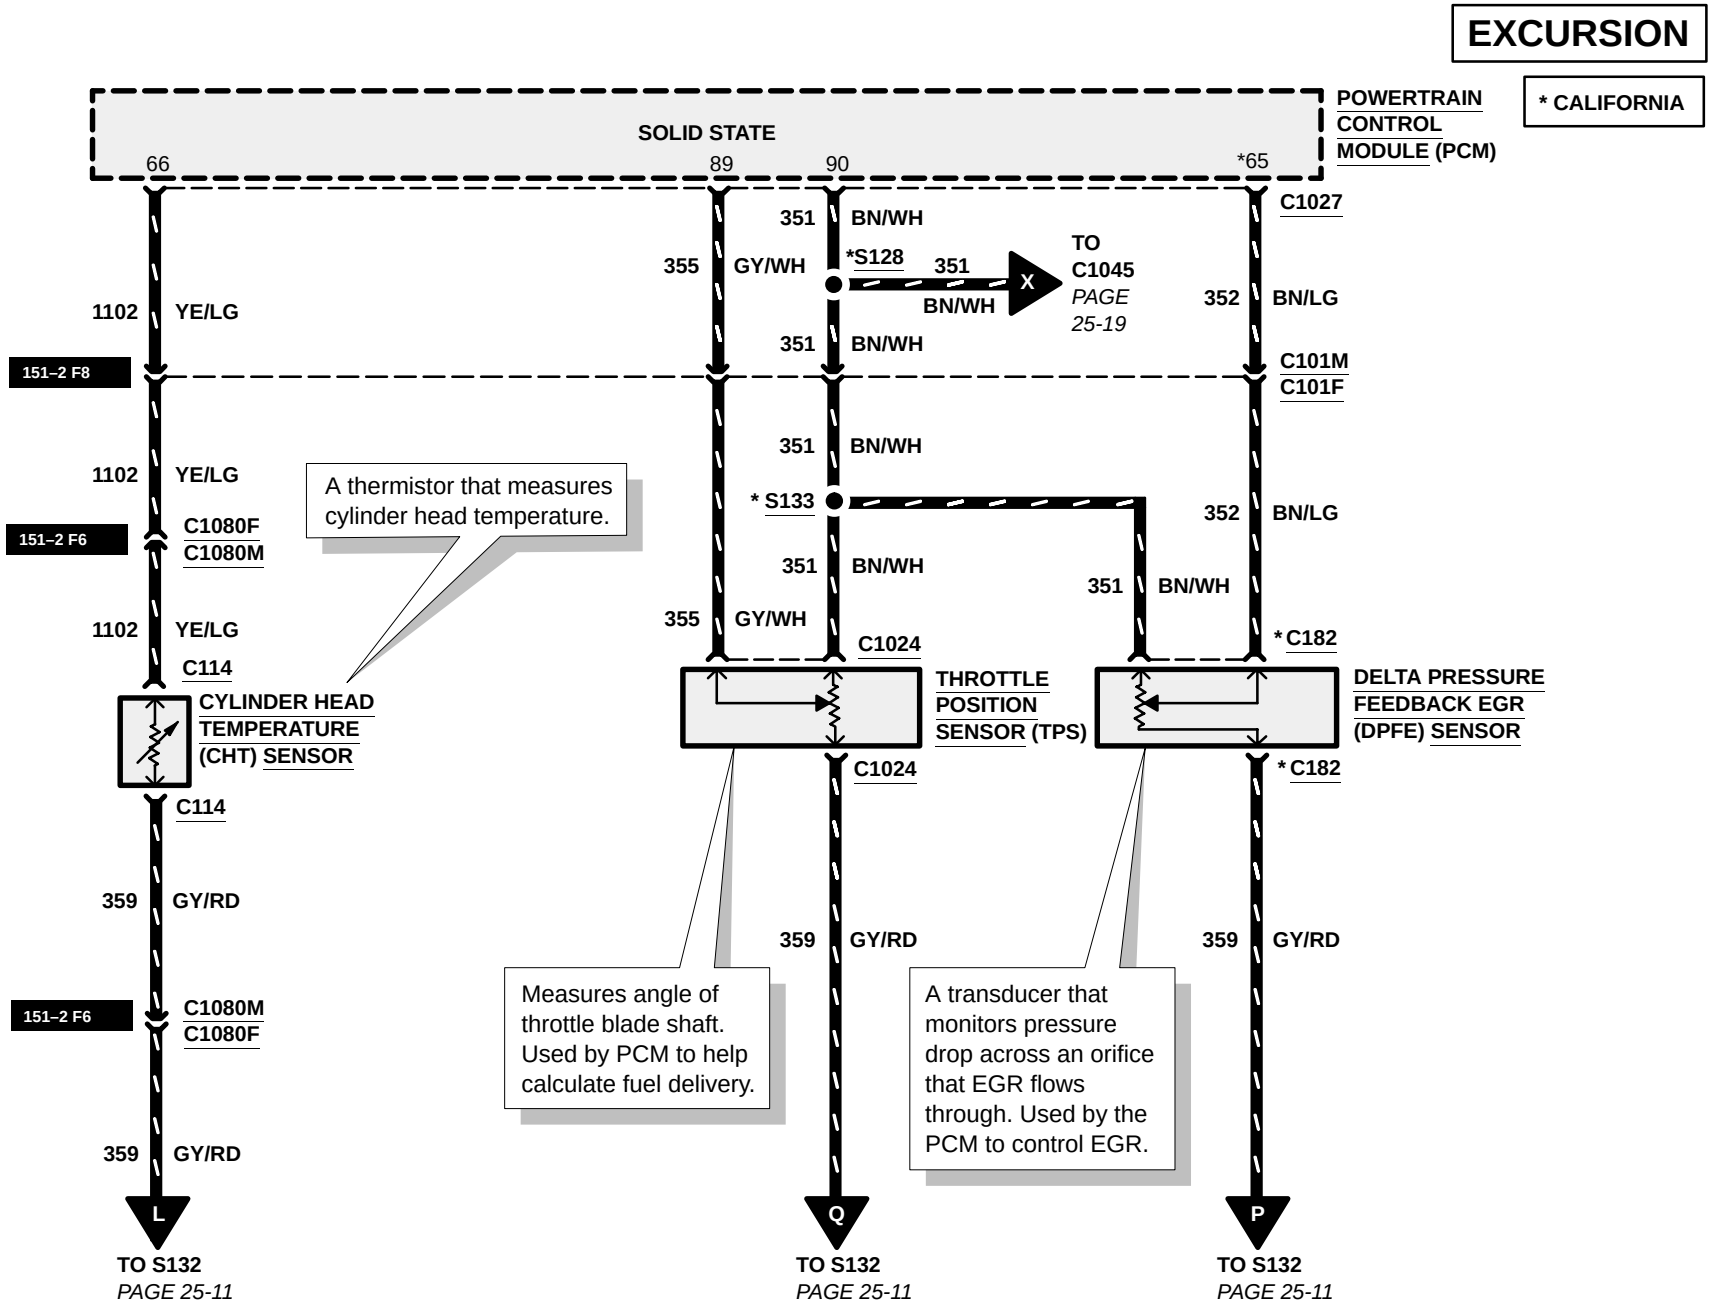
EXCURSION
* CALIFORNIA
SOLID STATE
POWERTRAIN CONTROL MODULE (PCM)
66
89
90
*65
C1027
351 BN/WH
355 GY/WH
*S128
351 BN/WH
TO C1045
PAGE 25-19
X
352 BN/LG
1102 YE/LG
151–2 F8
C101M
C101F
A thermistor that measures cylinder head temperature.
* S133
C1080F
C1080M
151–2 F6
C114
CYLINDER HEAD TEMPERATURE (CHT) SENSOR
C1024
THROTTLE POSITION SENSOR (TPS)
DELTA PRESSURE FEEDBACK EGR (DPFE) SENSOR
* C182
359 GY/RD
Measures angle of throttle blade shaft. Used by PCM to help calculate fuel delivery.
A transducer that monitors pressure drop across an orifice that EGR flows through. Used by the PCM to control EGR.
L
Q
P
TO S132
PAGE 25-11