C289

19D887

Fresh/recir-culation door actuator (19E616)



F06128

Pin	Circuit	Circuit function
1	660 (YE/LG)	Blend door actuator, signal
2	–	not used
3	435 (YE/LB)	Air temperature door variable resistor, wiper
4	438 (RD/WH)	Air temperature door variable resistor –
5	436 (RD/LG)	Air temperature door variable resistor +
6	1069 (OG/LB)	Blend door actuator, control

C290a (GY)

14401

Radio (18806)

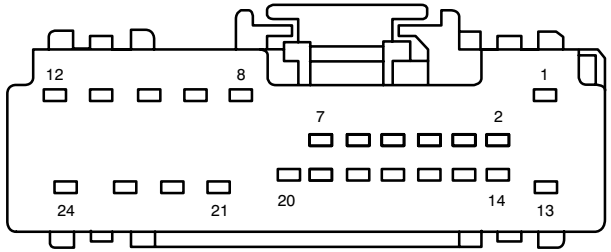

F24033

Pin	Circuit	Circuit function
1	828 (VT/LB)	Voltage supplied at all times (overload protected)
2	964 (DB/LG)	Voltage in Run or Accessory (overload protected)
3	–	not used
4	–	not used
5	–	not used
6	694 (BK/LG)	Ground
7	723 (GY/RD)	Cellular phone, wake up
8	804 (OG/LG)	Speaker, left front (18808) +
9	800 (GY/LB)	Speaker, left rear (18808) +
10	802 (OG/RD)	Speaker, right rear (18808) +
11	805 (WH/LG)	Speaker, right front (18808) +
12	811 (DG/OG)	Speaker, right front (18808) –
13	694 (BK/LG)	Ground
14	–	not used
15	689 (DB)	Voltage supplied in Start (overload protected)
16	–	not used
17	–	not used
18	595 (LB/RD)	Auxiliary audio controls, steering wheel, Reference voltage
19	–	not used
20	–	not used
21	813 (LB/WH)	Speaker, left front (18808) –
22	801 (TN/YE)	Speaker, left rear (18808) –
23	803 (BN/PK)	Speaker, right rear (18808) –
24	694 (BK/LG)	Ground