C2099

14401

N475
Passenger Air bag Deactivation (PAD) switch



F06052

Pin	Circuit	Circuit Function
1	–	not used
2	–	not used
3	1112 (WH/LB)	Passenger Air bag Deactivation (PAD) switch, input
4	649 (BK/OG)	Air bag, dedicated ground
5	364 (BK/LG)	Voltage in Run (overload protected)
6	1113 (YE/LG)	Passenger Air bag Deactivation (PAD) switch, indicator, control

C2100a

14401

A112
Generic Electronic Module (GEM)

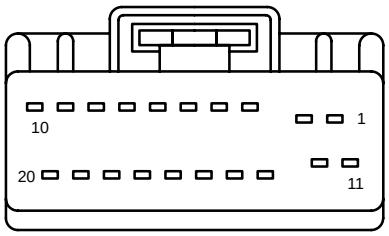

F20020

Pin	Circuit	Circuit Function
1	1001 (WH/YE)	Voltage supplied at all times (overload protected)
2	570 (BK/WH)	Ground
3	70 (LB/WH)	ISO Bus
4	–	not used
5	85 (BN/LB)	Safety belt buckle switch, input
6	–	not used
7	–	not used
8	–	not used
9	684 (PK/YE)	Wiper/washer, input
10	680 (LB/OG)	Wiper/washer, delay input
11	995 (GY)	Window motor, feed, Down
12	996 (OG/WH)	Window motor, feed, Down
13	–	not used
14	679 (GY/BK)	Vehicle Speed Sensor (VSS) +
15	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
16	–	not used
17	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
18	158 (BK/PK)	Key warning switch, input
19	–	not used
20	359 (GY/RD)	signal, return