C340 (BK)

14A005



F16167

(1) 34 (LB/OG)
(2) 359 (GY/RD)
(3) 791 (RD/PK)
(4) 570 (BK/WH)
(5) 962 (BN/WH)
(6) 523 (RD/PK)
(7) 5 (OG/LB)
(8) 787 (PK/BK)
(9) 91 (VT/WH)
(10) 9 (LG/OG)
(11) 519 (LG/BK)
(12) 351 (BN/WH)
(13) 140 (BK/PK)
(14) 29 (YE/WH)
(15) 14 (BN)
(16) 573 (BK/OG)

14405



F16095

(1) 34 (LB/OG)
(2) 359 (GY/RD)
(3) 791 (RD/PK)
(4) 570 (BK/WH)
(5) 962 (BN/WH)
(6) 523 (RD/PK)
(7) 5 (OG/LB)
(8) 787 (PK/BK)
(9) 91 (VT/WH)
(10) 9 (LG/OG)
(11) 519 (LG/BK)
(12) 351 (BN/WH)
(13) 140 (BK/PK)
(14) 29 (YE/WH)
(15) 14 (BN)
(16) 573 (BK/OG)

C349 (BK)

14B079

Rear Integrated Control Panel (RICP) (19980)

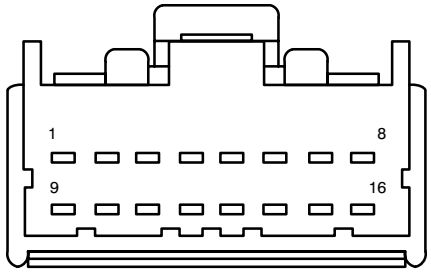

F16119

Pin	Circuit	Circuit function
1	801 (TN/YE)	Speaker, left rear (18808) –
2	800 (GY/LB)	Speaker, left rear (18808) +
3	803 (BN/PK)	Speaker, right rear (18808) –
4	802 (OG/RD)	Speaker, right rear (18808) +
5	–	not used
6	694 (BK/LG)	Ground
7	57 (BK)	Ground
8	235 (RD/BK)	Instrument illumination +
9	825 (TN/LG)	Speaker, right rear (18808) +
10	827 (TN/WH)	Speaker, left rear (18808) +
11	–	not used
12	832 (LB/PK)	Audio corporate protocol A
13	833 (TN)	Audio corporate protocol B
14	–	not used
15	1068 (LG/BK)	Audio System ON (ASYSON)
16	729 (RD/WH)	Voltage supplied at all times (overload protected)