C289

19C603

M256
Temperature blend
door actuator
(19E616)



F08059

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	773 (DG/OG)	Air temperature door variable resistor, wiper
4	–	not used
5	–	not used
6	–	not used
7	1003 (GY/YE)	Voltage supplied in Start and Run (overload protected)
8	1205 (BK)	Ground

C294a

14401

P76
Function selector
switch assembly



F08159

Pin	Circuit	Circuit function
1	575 (YE/BK)	Blower motor relay, control
2	1050 (LG/VT)	Voltage supplied in Start and Run (overload protected)
3	269 (LB/OG)	Heater blower motor (19805) to Heater blower switch
	349 (DB)	Heater blower motor (19805) to Heater blower switch
4	349 (DB)	Heater blower motor (19805) to Heater blower switch
	269 (LB/OG)	Heater blower motor (19805) to Heater blower switch
5	348 (VT)	A/C demand signal
6	–	not used
7	–	not used
8	–	not used

C293

19C603

M204
Front blower motor
resistor assembly

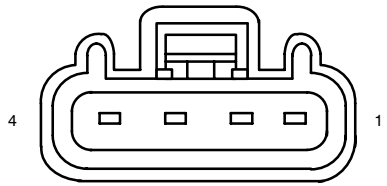

F04281

Pin	Circuit	Circuit function
1	752 (YE/RD)	Blower switch speed control, to resistor
2	261 (OG/BK)	Blower motor, to switch – High
3	754 (LG/WH)	Blower switch speed control, to resistor
4	1205 (BK)	Ground