C200 (BK)

14401

D20
Data Link Connector
(DLC)

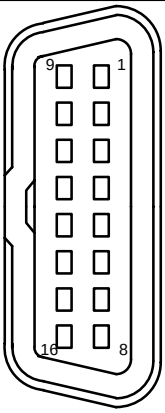

F16016

Pin	Circuit	Circuit Function
1	–	not used
2	4-EG7 (GY/RD)	Data link, bus positive
3	–	not used
4	31-RA1 (BK)	Ground
5	91-RA1 (BK/OG)	Ground
6	4-EC1 (GY/RD)	Data link, bus positive
7	8-EE10 (WH/BK)	Sensor signal
8	–	not used
9	–	not used
10	5-EG7 (BU/RD)	Data link, bus negative
11	–	not used
12	–	not used
13	29-RE14 (OG/BK)	Module programming signal
14	5-EC1 (BU/RD)	Data link, bus negative
15	–	not used
16	30-RA1 (RD)	Voltage supplied at all times (not overload protected)
	29-RA1 (OG)	Voltage supplied at all times (overload protected)

C201

8C290

M37
Engine cooling fan
motor



F02012

Pin	Circuit	Circuit Function
1	31-PA6 (BK)	Ground
2	15S-PA6 (GN/YE)	Voltage, ignition switch in Start or Run (not overload protected), switched

C202

8C290

M38
Second cooling fan
motor



F02012

Pin	Circuit	Circuit Function
1	31-PA16 (BK)	Ground
2	15S-PA16 (GN/OG)	Voltage, ignition switch in Start or Run (not overload protected), switched

C203

8C290

R27
Engine cooling fan
resistor



F02012

Pin	Circuit	Circuit Function
1	15S-PA9 (GN/WH)	Voltage, ignition switch in Start or Run (not overload protected), switched
2	15S-PA2 (GN/BU)	Voltage, ignition switch in Start or Run (not overload protected), switched