13-19 POWER DISTRIBUTION

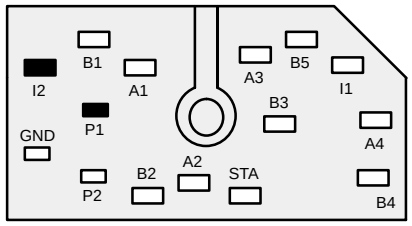

C292 (BLACK)
IGNITION SWITCH

PIN	CIRCUIT	CIRCUIT FUNCTION
B1	276 (BN)	Power (Hot at All Times)
I2	–	NOT USED
A1	297 (BK/LG)	Power (Hot in Acc or Run)
B2	568 (LG)	Power (Hot at All Times)
A2	687 (GY/YE)	Power (Hot in Run)
B3	568 (LG)	Power (Hot at All Times)
A3	687 (GY/YE)	Power (Hot in Run)
B4	37 (YE)	Power (Hot at All Times)
STA	33 (WH/VT)	Power (Hot in Start)
A4	489 (PK/BK)	Power (Hot in Run)
B5	276 (BN)	Power (Hot at All Times)
I1	262 (BN/VT)	Power (Hot in Start or Run)
GND	57 (BK)	Ground
P1	–	NOT USED
P2	409 (TN/BK)	Grounded in Start Output

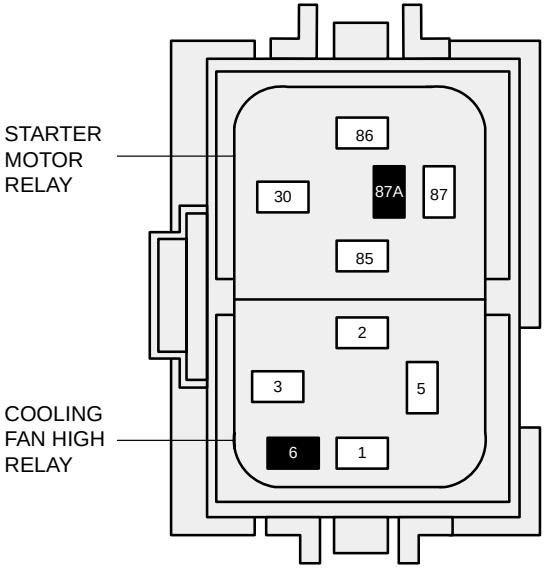

HIGH CURRENT RELAY CENTER

STARTER MOTOR RELAY

PIN	CIRCUIT	CIRCUIT FUNCTION
30	37 (YE)	Power (Hot at All Times)
85	57 (BK)	Ground
86	32 (RD/LB)	Power (Hot in Park or Neutral)
87	113 (YE/LB)	Switch Power Feed
87A	–	NOT USED

COOLING FAN HIGH RELAY

PIN	CIRCUIT	CIRCUIT FUNCTION
1	361 (RD)	Power (Hot in Start or Run)
2	639 (LG/VT)	Relay Common
3	1153 (RD/BK)	Power (Hot at All Times)
5	638 (OG/LB)	Switch Power Feed
6	–	NOT USED