-34

C102
14014

A112
Generic Electronic
Module (GEM)

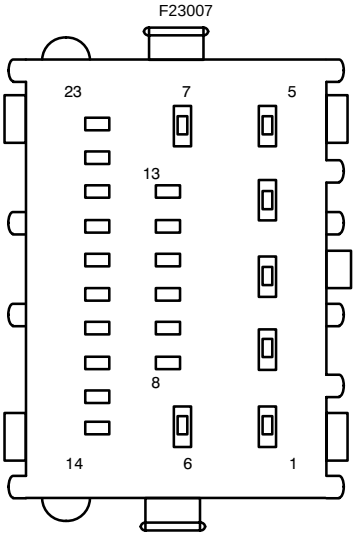

Pin	Circuit	Circuit Function
1	8-GL26 (WH/BK)	Sensor signal
	29S-GL26 (OG/GN)	Battery voltage, hot at all times (not fused and primary fused), switched
2	32-AA27 (WH/GN)	Switched between: Battery voltage, Ground or Open
3	33-AA59 (YE/BK)	Switched between: Battery voltage, Ground or Open
4	49S-LG19 (BU/RD)	Pulsed power feed (overload protected)
5	32-AA59C (WH/BK) +	Switched between: Battery voltage, Ground or Open
	32-AA59D (WH/BK)	Switched between: Battery voltage, Ground or Open
6	–	not used
7	–	not used
8	–	not used
9	–	not used
10	–	not used
11	–	not used
12	–	not used
13	–	not used
14	31S-GL27 (BK/OG)	Ground, switched
15	31S-GL12 (BK/OG)	Ground, switched
16	31S-AA64 (BK/GN)	Ground, switched
17	8-AG12 (WH/GN)	Sensor signal
	8-AA36 (WH)	Sensor signal
18	–	not used
19	–	not used
20	15S-KA1 (GN/BU)	Voltage, ignition switch in Start or Run (not overload protected), switched
21	–	not used
22	–	not used
23	–	not used