C2008

14401

Y215
Brake shift interlock



F03080

Pin	Circuit	Circuit function
1	810 (RD/LG)	Brake pedal position switch (13480), input
2	57 (BK)	Ground
3	1087 (OG)	Voltage in Run (overload protected)

C2009

14401

P78
Integrated control
panel

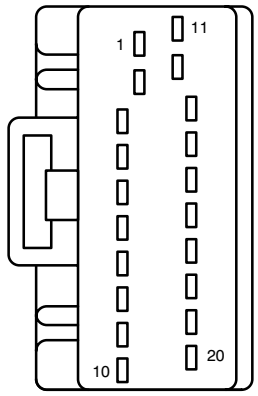

F20019

Pin	Circuit	Circuit function
1	57 (BK)	Ground
2	1045 (DB/WH)	Illumination dimmer, output
3	–	not used
4	1068 (LG/BK)	Audio System ON (ASYSON)
5	–	not used
6	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
7	59 (DG/VT)	Fused rear window defrost relay, switched power
8	–	not used
9	593 (DB/WH)	Cassette, Right +
10	504 (WH/PK)	Cassette, Left -
11	385 (WH/RD)	Voltage supplied at all times (overload protected)
12	694 (BK/YE)	audio ground
13	832 (LB/PK)	Audio corporate protocol A
14	833 (TN)	Audio corporate protocol B
15	723 (GY/RD)	Cellular phone, mute
16	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
17	1010 (DB/OG)	Rear window defrost switch (18578), input
18	–	not used
19	594 (GY)	Cassette, Right -
20	503 (BN/LG)	Cassette, Left +