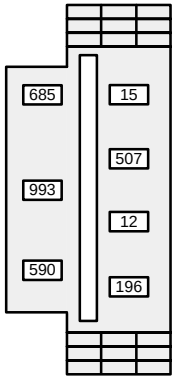

C210
MULTIFUNCTION SWITCH

PIN	CIRCUIT	CIRCUIT FUNCTION
685	684 (PK/YE)	Mode Select Input
15	15 (RD/YE)	Power (Hot in Head)
507	13 (RD/BK)	Dimmer to Low Beams
993	359 (GY/RD)	Signal Return
12	632 (GY/OG)	Dimmer to High Beams
590	680 (LB/OG)	Interval Delay
196	196 (DB/OG)	Power (Hot in Flash to Pass)

CONNECTOR REFERENCE LIST

CONNECTOR	SECTION-PAGE
C134	97-3
C210	85-2
C216	13-25
C287	62-7