C168

12B637

A280
5R44E Transmission

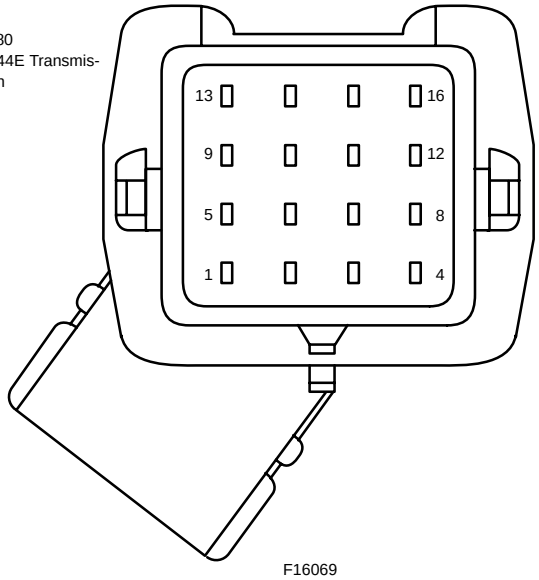

F16069

Pin	Circuit	Circuit Function
1	34 (LB/OG)	Voltage supplied in Start and Run (overload protected)
2	970 (DG/WH)	Turbine shaft speed (TSS) sensor
3	359 (GY/RD)	signal, return
4	923 (OG/BK)	Transmission Fluid Temperature (TFT) sensor, input
5	480 (VT/YE)	Torque Converter Clutch (TCC) solenoid
6	–	not used
7	971 (PK/BK)	Shift solenoid C
8	359 (GY/RD)	signal, return
9	924 (BN/OG)	Shift solenoid D
10	34 (LB/OG)	Voltage supplied in Start and Run (overload protected)
11	34 (LB/OG)	Voltage supplied in Start and Run (overload protected)
12	925 (WH/YE)	Electronic Pressure Control (EPC) solenoid
13	–	not used
14	315 (VT/OG)	Shift solenoid B
15	–	not used
16	237 (OG/YE)	Shift solenoid A

C169

12B637

N19
Reversing lamps switch

2.5L, 4.0L



F02353

3.0L



F02355

Pin	Circuit	Circuit Function
1	140 (BK/PK)	Voltage supplied in reverse
2	298 (VT/OG)	Voltage in Run (overload protected)

C171

12B637

B48
Heated Oxygen Sensor (HO2S) #11



F04075

Pin	Circuit	Circuit Function
1	34 (LB/OG)	Voltage supplied in Start and Run (overload protected)
2	387 (RD/WH)	Heated Oxygen Sensor (HO2S) #11, heater
3	89 (OG)	signal, return
4	74 (GY/LB)	Heated Oxygen Sensor (HO2S) #11, input