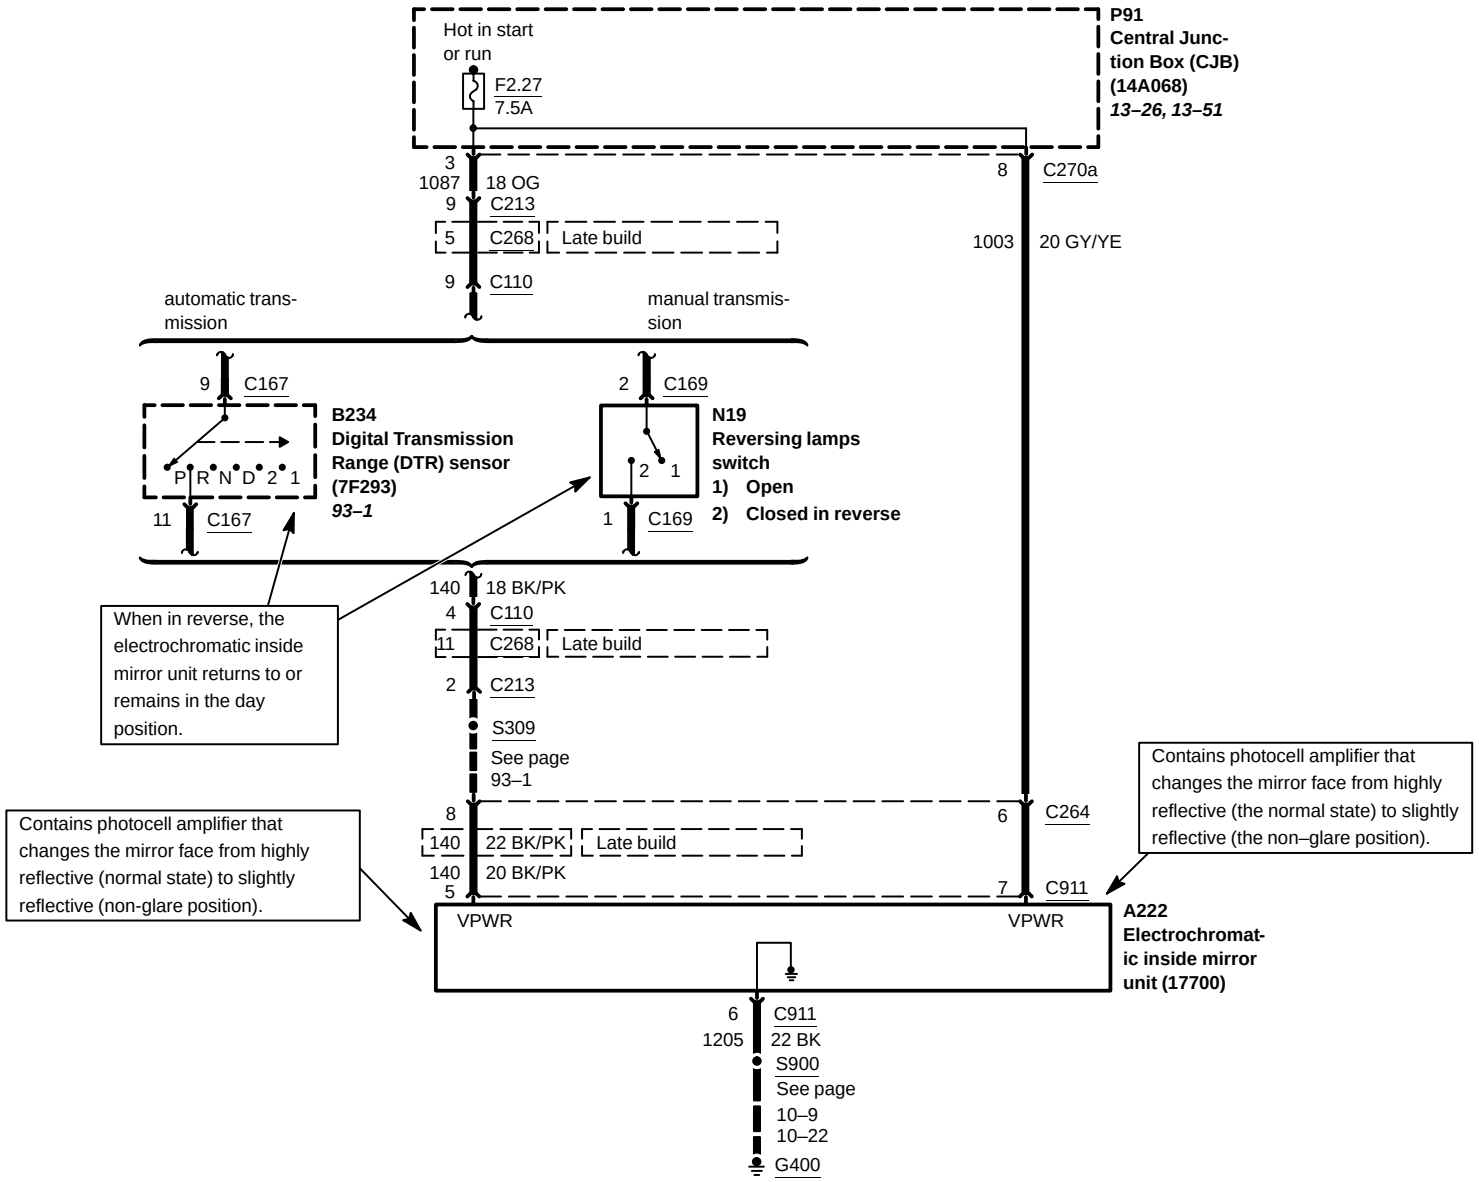
Hot in start or run
F2.27
7.5A
P91
Central Junction Box (CJB)
(14A068)
13–26, 13–51
3
1087
18 OG
9
C213
5
C268
Late build
9
C110
8
C270a
1003
20 GY/YE
automatic transmission
manual transmission
9
C167
B234
Digital Transmission Range (DTR) sensor
(7F293)
93–1
P R N D 2 1
11
C167
2
C169
N19
Reversing lamps switch
1) Open
2) Closed in reverse
2 1
1
C169
When in reverse, the electrochromatic inside mirror unit returns to or remains in the day position.
140
18 BK/PK
4
C110
11
C268
Late build
2
C213
S309
See page 93–1
Contains photocell amplifier that changes the mirror face from highly reflective (normal state) to slightly reflective (non-glare position).
8
140
22 BK/PK
Late build
140
20 BK/PK
5
6
C264
7
C911
Contains photocell amplifier that changes the mirror face from highly reflective (the normal state) to slightly reflective (the non–glare position).
VPWR
VPWR
A222
Electrochromatic inside mirror unit (17700)
6
C911
1205
22 BK
S900
See page 10–9
10–22
G400