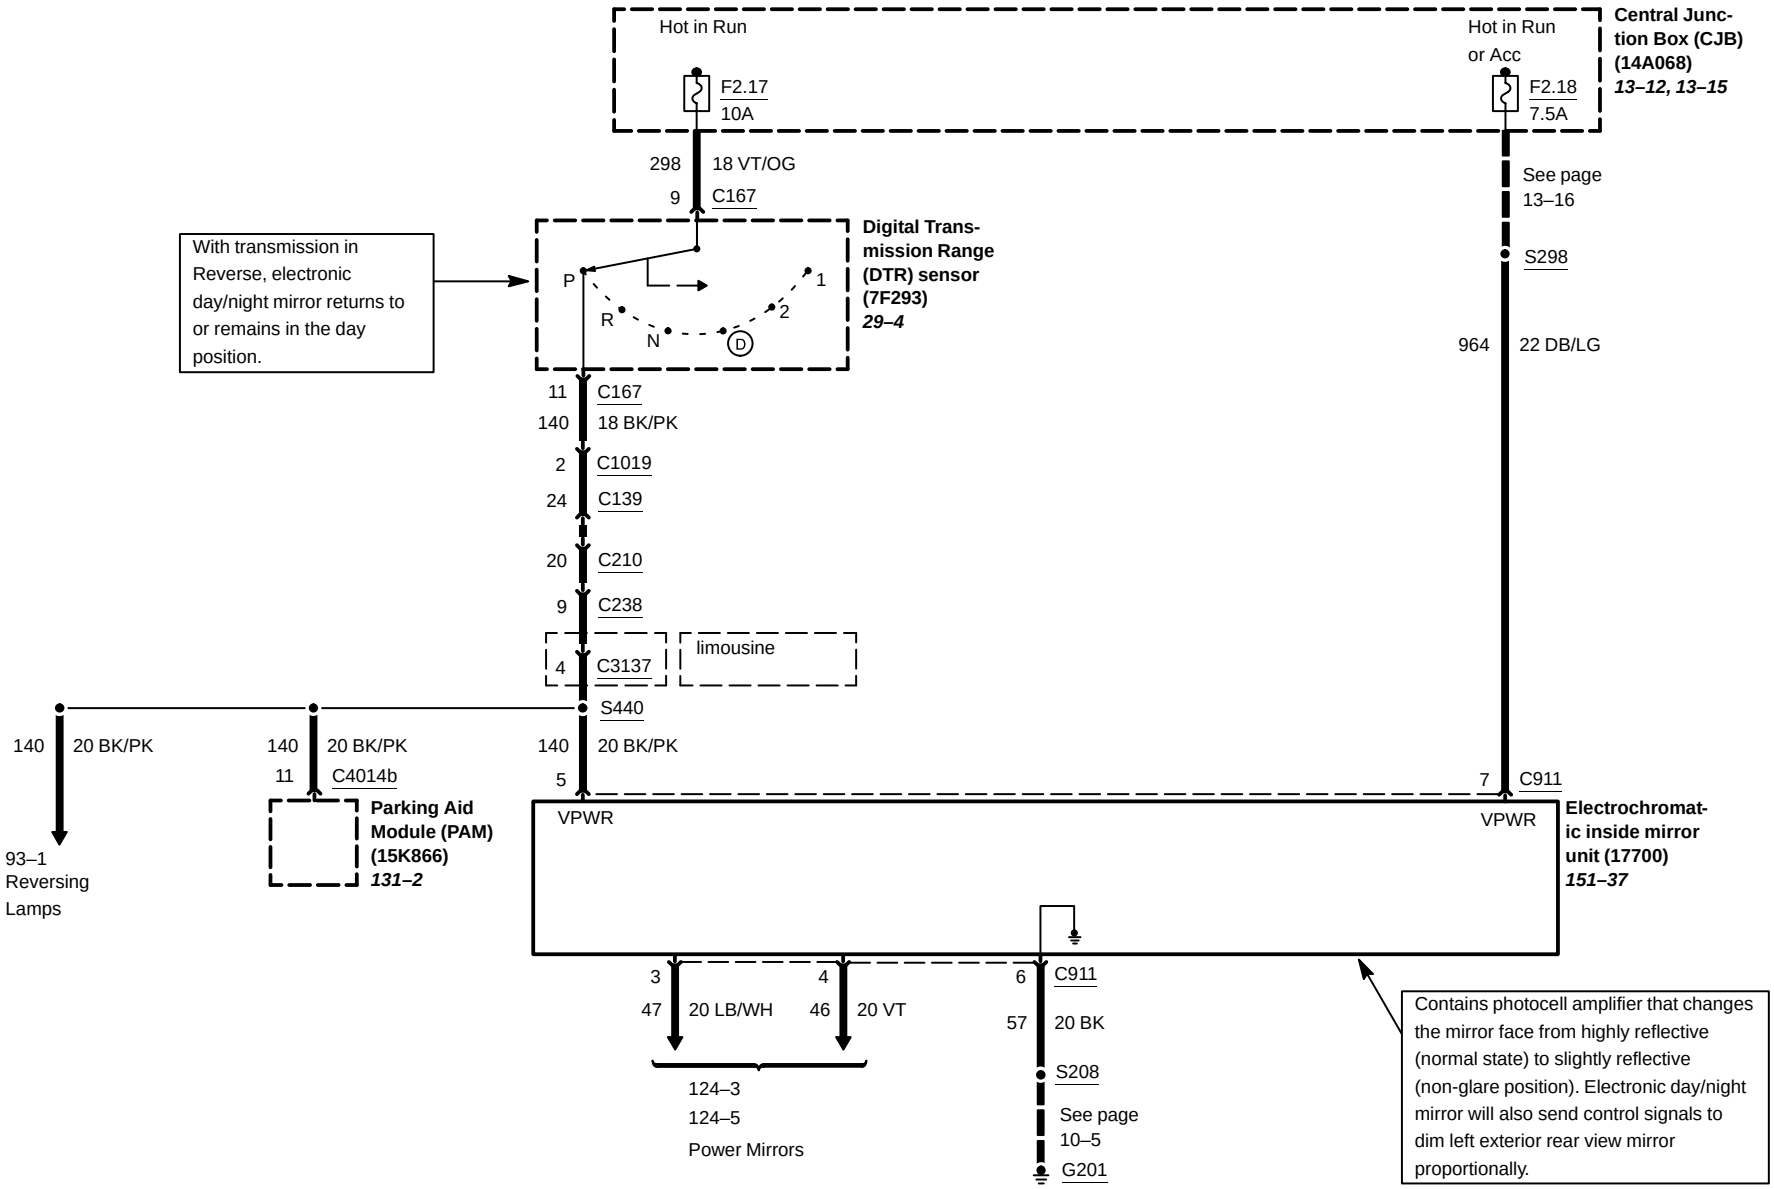
Hot in Run
F2.17
10A
Hot in Run
or Acc
F2.18
7.5A
Central Junction Box (CJB) (14A068)
13–12, 13–15
298
18 VT/OG
9
C167
See page 13–16
S298
964
22 DB/LG
With transmission in Reverse, electronic day/night mirror returns to or remains in the day position.
P
R
N
D
1
2
Digital Transmission Range (DTR) sensor (7F293)
29–4
11
C167
140
18 BK/PK
2
C1019
24
C139
20
C210
9
C238
4
C3137
limousine
S440
140
20 BK/PK
140
20 BK/PK
11
C4014b
140
20 BK/PK
5
7
C911
VPWR
VPWR
Electrochromatic inside mirror unit (17700)
151–37
93–1
Reversing
Lamps
Parking Aid Module (PAM) (15K866)
131–2
3
47
20 LB/WH
4
46
20 VT
6
C911
57
20 BK
S208
See page 10–5
G201
124–3
124–5
Power Mirrors
Contains photocell amplifier that changes the mirror face from highly reflective (normal state) to slightly reflective (non-glare position). Electronic day/night mirror will also send control signals to dim left exterior rear view mirror proportionally.