W/O EATC

* W/ROOF OPENING PANEL
** W/O ROOF OPENING PANEL



***C386**
****C926 (GRAY)**
REAR BLOWER MOTOR SWITCH

PIN	CIRCUIT	CIRCUIT FUNCTION
1	269 (LB/OG)	Low Position
	269 (LB/OG)	Low Position
2	515 (OG/RD)	High Position
3	–	NOT USED
4	1120 (BK/WH)	Speed Select Blower Switch
5	751 (DB/WH)	Medium Position
	751 (DB/WH)	Medium Position
6	756 (RD/PK)	Rear Position

REAR BLOWER SWITCH W/O EATC

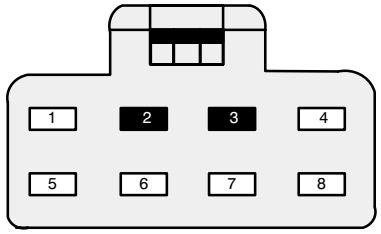

C313 (WHITE)
REAR INTEGRATED CONTROL PANEL
(RICP)

PIN	CIRCUIT	CIRCUIT FUNCTION
1	1136 (RD/WH)	Switch to Recirculating Door Solenoid
2	–	NOT USED
3	–	NOT USED
4	1137 (YE/LG)	Switch to Blend Door Potentiometer
5	1134 (OG/BK)	Rear Blower Speed (HIGH)
6	1135 (LB/OG)	Rear Blower Speed (MEDIUM)
7	57 (BK)	Ground
8	294 (WH/LB)	Power (Hot in Run)

CONNECTOR REFERENCE LIST

CONNECTOR	SECTION-PAGE
C174	24-9, 25-9
C242	13-29
C243	13-28