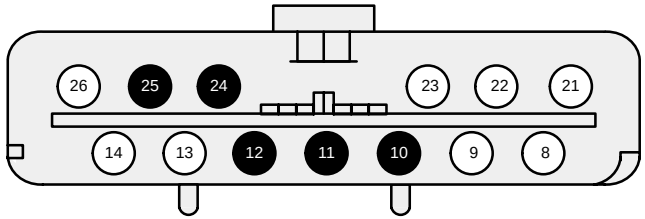


**C275 (BLACK)**

**ELECTRONIC AUTOMATIC TEMPERATURE CONTROL (EATC) MODULE**

| PIN | CIRCUIT | CIRCUIT FUNCTION |
|---|---|---|
| 8 | 465 (WH/LB) | EATC to Steering Wheel Controls |
| 9 | 243 (LG/OG) | Blend Door Actuator Potentiometer Ground |
| 10 | – | NOT USED |
| 11 | – | NOT USED |
| 12 | – | NOT USED |
| 13 | 250 (OG) | Blend Door Actuator Motor Drive |
| 14 | 19 (LB/RD) | Illumination Input |
| 21 | 790 (WH/OG) | In-Car Temperature Sensor Reference |
| 22 | 688 (GY/LB) | EATC to Rear Window Defrost Relay Output |
| 23 | 184 (TN/OG) | Blower Speed Output |
| 24 | – | NOT USED |
| 25 | – | NOT USED |
| 26 | 249 (DB/LG) | Blend Door Actuator Motor Drive |

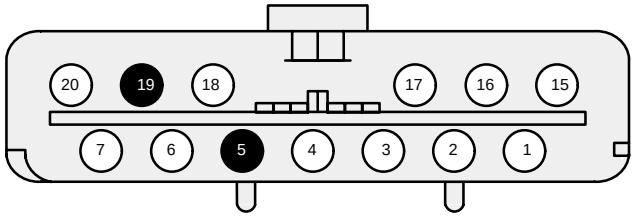


**C274 (WHITE)**

**ELECTRONIC AUTOMATIC TEMPERATURE CONTROL (EATC) MODULE**

| PIN | CIRCUIT | CIRCUIT FUNCTION |
|---|---|---|
| 1 | 915 (PK/LB) | Multiplex Communication Network Data (–) |
| 2 | 1111 (VT) | Power (Hot at All Times) |
| 3 | 57 (BK) | Ground |
| 4 | 470 (PK/BK) | Sensor Ground |
| 5 | – | NOT USED |
| 6 | 776 (OG/BK) | Blend Door Actuator Potentiometer +5V |
| 7 | 788 (RD/OG) | Ambient Air Temperature Sensor Input |
| 15 | 914 (TN/OG) | Multiplex Communication Network Data (+) |
| 16 | 298 (VT/OG) | Power (Hot in Run) |
| 17 | 364 (BK/LG) | Blower Motor Relay Ground Feed |
| 18 | 351 (BN/WH) | Blend Door Position Feedback |
| 19 | – | NOT USED |
| 20 | 468 (BN) | Sunload Sensor Input |