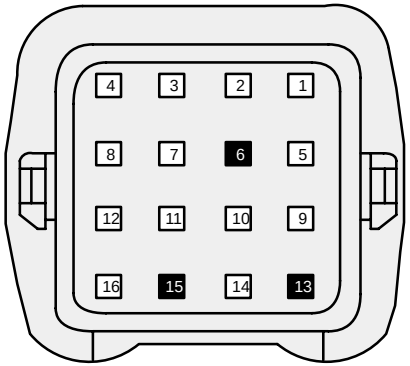

C177
5R55E AUTOMATIC TRANSMISSION

PIN	CIRCUIT	CIRCUIT FUNCTION
1	34 (LB/OG)	Vehicle Power
2	970 (DG/WH)	Turbine Shaft Speed (TSS) Sensor
3	359 (GY/RD)	Signal Return
4	923 (OG/BK)	Transmission Fluid Temperature (TFT) Sensor
5	480 (VT/YE)	Torque Converter Clutch (TCC) Solenoid
6	–	NOT USED
7	971 (PK/BK)	Shift Solenoid C
8	359 (GY/RD)	Signal Return
9	924 (BN/OG)	Shift Solenoid D
10	34 (LB/OG)	Vehicle Power
11	34 (LB/OG)	Vehicle Power
12	925 (WH/YE)	Electronic Pressure Control (EPC) Solenoid
13	–	NOT USED
14	315 (VT/OG)	Shift Solenoid B
15	–	NOT USED
16	237 (OG/YE)	Shift Solenoid A

5R55E

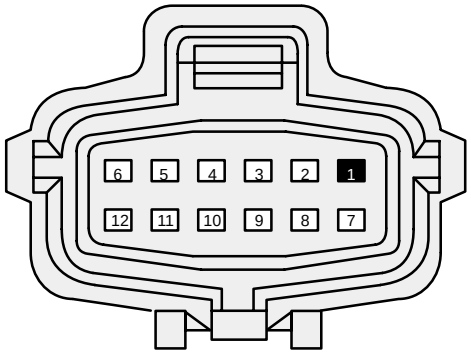

C112
DIGITAL TRANSMISSION RANGE (DTR) SENSOR

PIN	CIRCUIT	CIRCUIT FUNCTION
1	–	NOT USED
2	359 (GY/RD)	Signal Return
3	199 (LB/YE)	Digital Transmission Range (DTR) Sensor TR3A
4	1144 (YE/BK)	Digital Transmission Range (DTR) Sensor TR1
5	1145 (LB/BK)	Digital Transmission Range (DTR) Sensor TR2
6	1143 (WH/BK)	Digital Transmission Range (DTR) Sensor TR4
7	57 (BK)	Ground
8	463 (RD/WH)	Neutral
9	298 (VT/OG)	Power (Hot in Run)
10	1093 (TN/RD)	Start Circuit
11	140 (BK/PK)	Reversing Lamps Feed
12	329 (PK)	Start Circuit