C270f (BK)

12A581

P91
Central Junction
Box (CJB) (14A068)



F12056

Pin	Circuit	Circuit function
1	140 (BK/PK)	Voltage supplied in reverse
2	161 (DG/OG)	Headlamp, right (13008), (Low beam lamp feed)
3	160 (DB/WH)	Headlamp, left (13008), (Low beam lamp feed)
4	533 (TN/RD)	Voltage supplied at all times (overload protected)
5	57 (BK)	Ground
6	1093 (TN/RD)	Power, Hot in Start with Park or Neutral
7	54 (LG/YE)	Voltage supplied at all times (overload protected)
8	–	not used
9	–	not used
10	926 (LB/OG)	Fuel pump relay, control
11	57 (BK)	Ground
12	321 (GY/WH)	A/C clutch relay, switched output

C270g (BK)

12A581

P91
Central Junction
Box (CJB) (14A068)

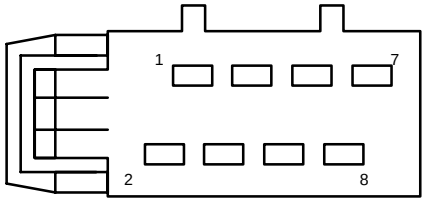

F08112

Pin	Circuit	Circuit function
1	–	not used
2	113 (YE/LB)	Starter motor (11002), to, Starter relay (11450)
3	–	not used
4	13 (RD/BK)	Power, Hot with Low Beams on
5	22 (LB/BK)	Brake feed
6	181 (BN/OG)	Voltage supplied at all times (overload protected)
7	729 (RD/WH)	Voltage supplied at all times (overload protected)
8	876 (DG/LG)	Power, from, Injector Driver Module (IDM) power relay