C228a

14401

A205
Electronic Automatic
Temperature Control
(EATC) module
(19980)

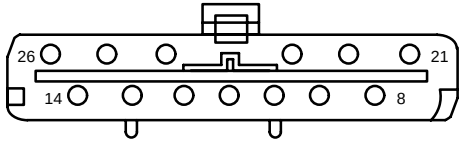

F13002

Pin	Circuit	Circuit function
8	1070 (BN/LB)	Steering wheel control
9	247 (WH/YE)	Blend door actuator, Sensor, return
10	–	not used
11	348 (VT)	A/C demand signal
12	–	not used
13	250 (OG)	Power, Blend door actuator
14	19 (LB/RD)	Voltage supplied at all times (overload protected)
21	790 (WH/OG)	In–vehicle temperature sensor (19C734), input
22	575 (YE/BK)	Blower motor relay, control
23	184 (TN/OG)	Blower motor speed controller, signal
24	–	not used
25	–	not used
26	249 (DB/LG)	Power, Blend door actuator

C228b

14401

A205
Electronic Automatic
Temperature Control
(EATC) module
(19980)

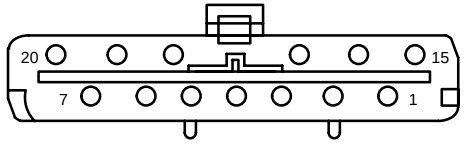

F13003

Pin	Circuit	Circuit function
1	915 (PK/LB)	SCP Bus –
2	729 (RD/WH)	Voltage supplied at all times (overload protected)
3	57 (BK)	Ground
4	470 (PK/BK)	Sensor signal return (reference/ground)
5	–	not used
6	243 (LG/OG)	Reference voltage, to, Blend door actuator
7	767 (LB/OG)	Ambient air temperature sensor (19E702), feed
15	914 (TN/OG)	SCP Bus +
16	296 (WH/VT)	Fused accessory relay, switched power, output
17	461 (OG)	Switched ground, to, Blower motor relay
18	246 (VT)	Temperature blend door actuator (19E616), signal
19	434 (LB/BK)	Analog dimming, feed
20	468 (BN)	Sunload sensor (19E663), input