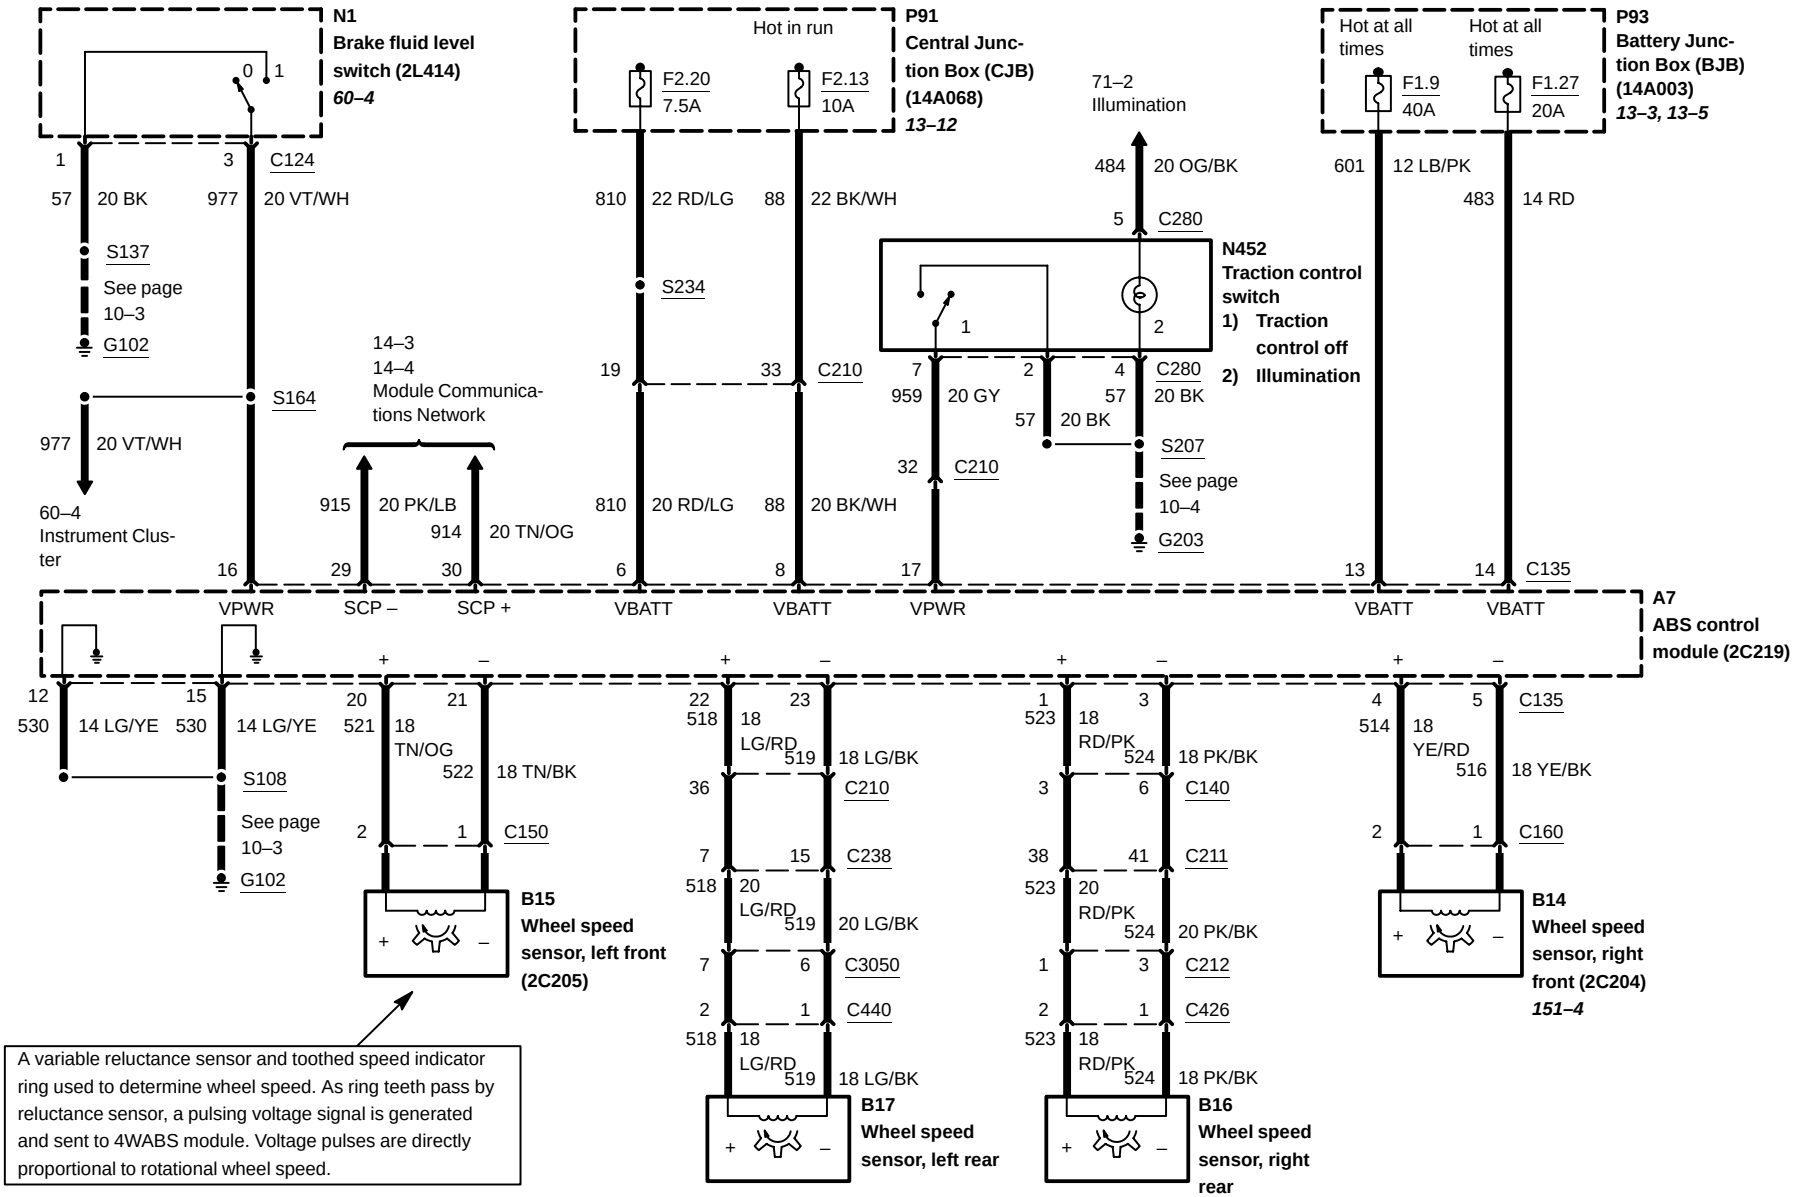
N1
Brake fluid level switch (2L414)
60–4
0
1
1
3
C124
57
20 BK
977
20 VT/WH
S137
See page 10–3
G102
S164
977
20 VT/WH
60–4
Instrument Cluster
16
VPWR
14–3
14–4
Module Communications Network
915
20 PK/LB
914
20 TN/OG
29
SCP –
30
SCP +
P91
Central Junction Box (CJB) (14A068)
13–12
Hot in run
F2.20
7.5A
F2.13
10A
810
22 RD/LG
88
22 BK/WH
S234
19
33
C210
810
20 RD/LG
88
20 BK/WH
6
VBATT
8
VBATT
71–2
Illumination
484
20 OG/BK
5
C280
N452
Traction control switch
1) Traction control off
2) Illumination
1
2
7
959
20 GY
2
57
20 BK
4
57
20 BK
C280
S207
See page 10–4
G203
32
C210
17
VPWR
P93
Battery Junction Box (BJB) (14A003)
13–3, 13–5
Hot at all times
Hot at all times
F1.9
40A
F1.27
20A
601
12 LB/PK
483
14 RD
13
VBATT
14
VBATT
C135
A7
ABS control module (2C219)
12
530
14 LG/YE
15
530
14 LG/YE
S108
See page 10–3
G102
20
521
18 TN/OG
21
522
18 TN/BK
2
1
C150
B15
Wheel speed sensor, left front (2C205)
22
518
18 LG/RD
23
519
18 LG/BK
36
C210
7
15
C238
518
20 LG/RD
519
20 LG/BK
7
6
C3050
2
1
C440
518
18 LG/RD
519
18 LG/BK
B17
Wheel speed sensor, left rear
1
523
18 RD/PK
3
524
18 PK/BK
3
6
C140
38
41
C211
523
20 RD/PK
524
20 PK/BK
1
3
C212
2
1
C426
523
18 RD/PK
524
18 PK/BK
B16
Wheel speed sensor, right rear
4
514
18 YE/RD
5
516
18 YE/BK
2
1
C160
B14
Wheel speed sensor, right front (2C204)
151–4
A variable reluctance sensor and toothed speed indicator ring used to determine wheel speed. As ring teeth pass by reluctance sensor, a pulsing voltage signal is generated and sent to 4WABS module. Voltage pulses are directly proportional to rotational wheel speed.