C175t (BK)

15525

Powertrain Control Module (PCM) (12A650)

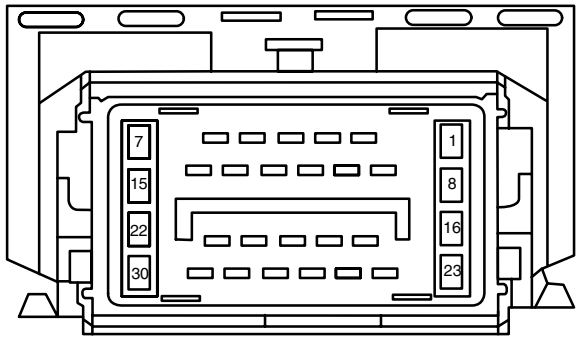

F30009

Pin	Circuit	Circuit function
1	–	not used
2	393 (VT/LG)	Heated Oxygen Sensor (HO2S) #22 (9G444), input
3	392 (RD/LG)	Heated Oxygen Sensor (HO2S) #12 (9G444), input
4	–	not used
5	–	not used
6	–	not used
7	–	not used
8	–	not used
9	–	not used
10	–	not used
11	480 (VT/YE)	Torque Converter Clutch (TCC) solenoid
12	237 (OG/YE)	Shift solenoid A
13	315 (VT/OG)	Shift solenoid B
14	924 (BN/OG)	Powertrain Control Module (PCM) (12A650), to transmission coast clutch solenoid
15	–	not used
16	–	not used
17	199 (LB/YE)	Digital Transmission Range (DTR) sensor, TR3A
18	1145 (LB/BK)	Digital Transmission Range (DTR) sensor, TR2
19	1143 (WH/BK)	Digital Transmission Range (DTR) sensor, TR4
20	1144 (YE/BK)	Digital Transmission Range (DTR) sensor, TR1
21	389 (WH/BK)	Heated Oxygen Sensor (HO2S) #12 (9G444), heater
22	–	not used
23	925 (WH/YE)	Electronic Pressure Control (EPC) solenoid, control
24	–	not used
25	136 (DB/YE)	Output Shaft Speed (OSS) sensor (7M101)
26	970 (DG/WH)	Turbine Shaft Speed (TSS) sensor
27	359 (GY/RD)	signal, return
28	923 (OG/BK)	Transmission Fluid Temperature (TFT) sensor, input
29	390 (TN/YE)	Heated Oxygen Sensor (HO2S) #22 (9G444), heater
30	–	not used

C177

12A581

Forward crash sensor



F02132

Pin	Circuit	Circuit function
1	618 (VT/LG)	Forward crash sensor, return
2	617 (PK/OG)	Forward crash sensor, feed

C180 (BK)

12B637

Camshaft position sensor (6B288)



F02331

Pin	Circuit	Circuit function
1	796 (LB)	Camshaft position sensor (6B288), signal, return
2	795 (DG)	Camshaft position sensor (6B288) to Powertrain Control Module (PCM) (12A650)