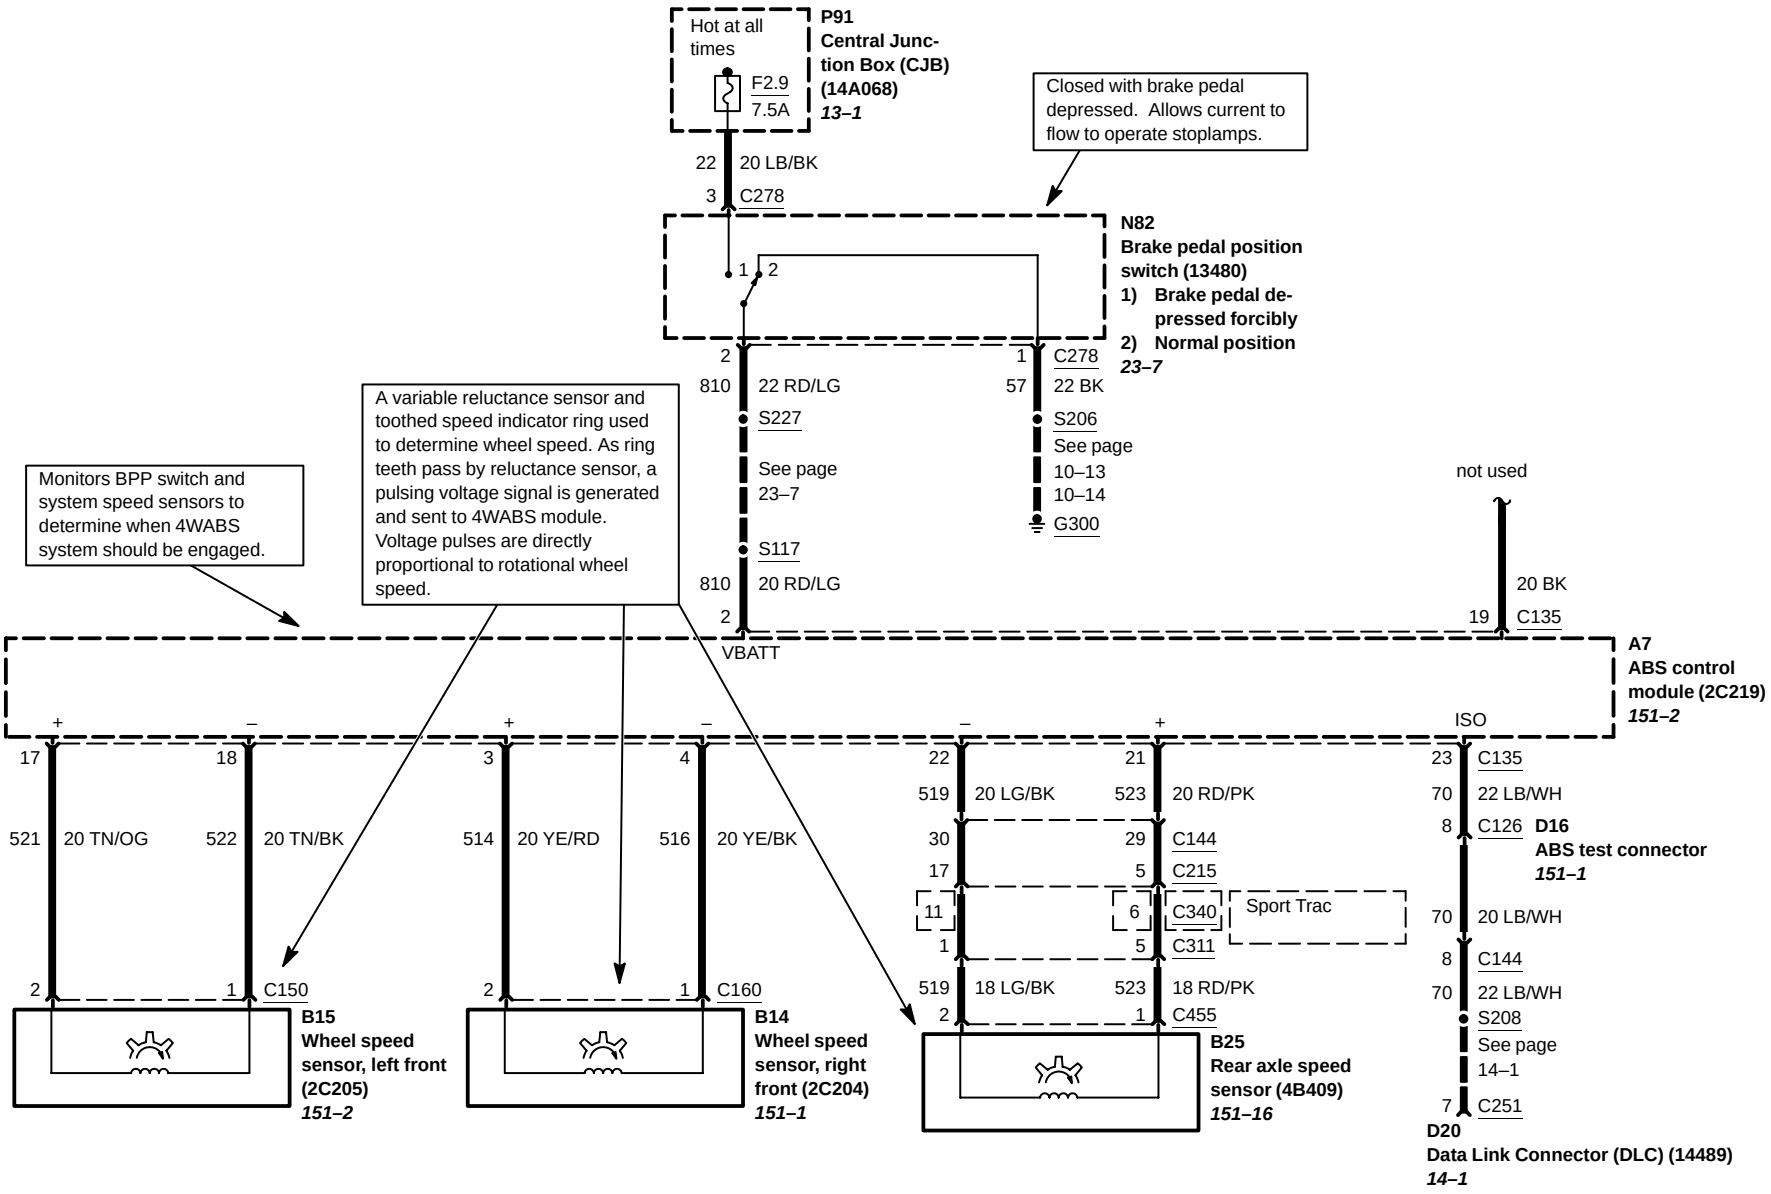
Hot at all times
F2.9
7.5A
P91
Central Junction Box (CJB) (14A068)
13–1
22 20 LB/BK
3 C278
Closed with brake pedal depressed. Allows current to flow to operate stoplamps.
N82
Brake pedal position switch (13480)
1) Brake pedal depressed forcibly
2) Normal position
23–7
1 2
2 810 22 RD/LG
S227
See page 23–7
S117
810 20 RD/LG
2
VBATT
1 C278
57 22 BK
S206
See page 10–13 10–14
G300
A variable reluctance sensor and toothed speed indicator ring used to determine wheel speed. As ring teeth pass by reluctance sensor, a pulsing voltage signal is generated and sent to 4WABS module. Voltage pulses are directly proportional to rotational wheel speed.
Monitors BPP switch and system speed sensors to determine when 4WABS system should be engaged.
not used
19 C135
20 BK
A7
ABS control module (2C219)
151–2
+ – + – – + ISO
17 521 20 TN/OG
18 522 20 TN/BK
3 514 20 YE/RD
4 516 20 YE/BK
22 519 20 LG/BK
21 523 20 RD/PK
30 C144
29 C144
17 C215
5 C215
11 C340
6 C340
Sport Trac
1 C311
5 C311
519 18 LG/BK
523 18 RD/PK
2 C455
1 C455
23 C135
70 22 LB/WH
8 C126
D16
ABS test connector
151–1
70 20 LB/WH
8 C144
70 22 LB/WH
S208
See page 14–1
7 C251
D20
Data Link Connector (DLC) (14489)
14–1
2 C150
1 C150
B15
Wheel speed sensor, left front (2C205)
151–2
2 C160
1 C160
B14
Wheel speed sensor, right front (2C204)
151–1
B25
Rear axle speed sensor (4B409)
151–16