C281a (BK)

* without IVD

7A786

Four–wheel drive control module

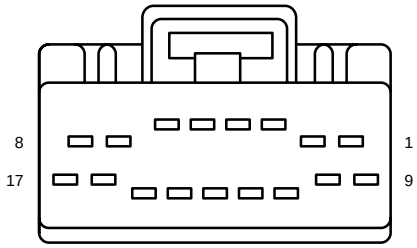

F17005

Pin	Circuit	Circuit function
1	1205 (BK)	Ground
2	778 (OG)	Transmission shift motor, High, to, Low
3	762 (YE/WH)	Motor position 6, Ground
4	763 (OG/WH)	Motor position 1
5	764 (BN/WH)	Motor position 2
6	770 (WH)	Motor position 3
7	771 (VT/YE)	Motor position 4
8	976 (OG)	clutch, Coil, monitor
9	777 (YE)	Transmission shift motor, Low, to, High
10	*236 (BK/LG)	front, Transfer case speed sensor, signal
11	*772 (LB)	rear, Transfer case speed sensor, signal
12	*359 (GY/RD)	signal, return
13	*774 (LG)	Sensor, voltage
14	–	not used
15	–	not used
16	–	not used
17	779 (BN)	clutch, Coil, Power

C281b (GY)

* without IVD

7A786

Four–wheel drive control module

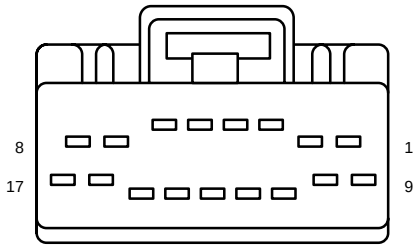

F17005

Pin	Circuit	Circuit function
1	*3125 (RD/YE)	CAN Bus –
2	1203 (BK/LB)	Ground
3	782 (BN/WH)	Neutral tow indicator
4	693 (OG)	UBP Diagnostics
5	784 (LB/BK)	Four–wheel drive, indicator
6	–	not used
7	939 (VT)	ABS control module (2C219) to Four–wheel drive control module
8	972 (BK/WH)	Voltage supplied at all times (overload protected)
9	*3126 (TN/YE)	CAN Bus +
10	359 (GY/RD)	signal, return
11	463 (RD/WH)	Neutral, switch sense, input
12	–	not used
13	511 (LG)	Brake pedal position switch (13480), input
14	357 (YE/WH)	Throttle Position Sensor (TPS) (9B989), signal, input
15	–	not used
16	780 (DB)	Four–wheel drive control module to Four–wheel drive switch
17	994 (WH)	Voltage supplied at all times (overload protected)