C110

15525

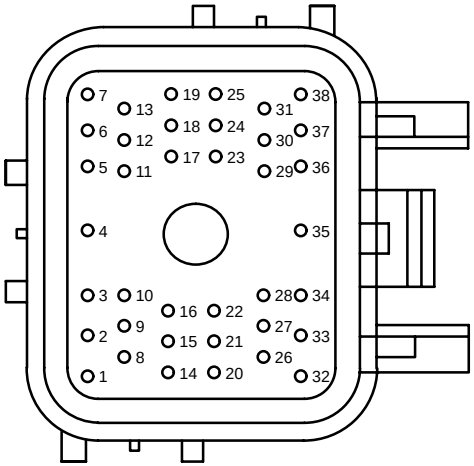

12A581

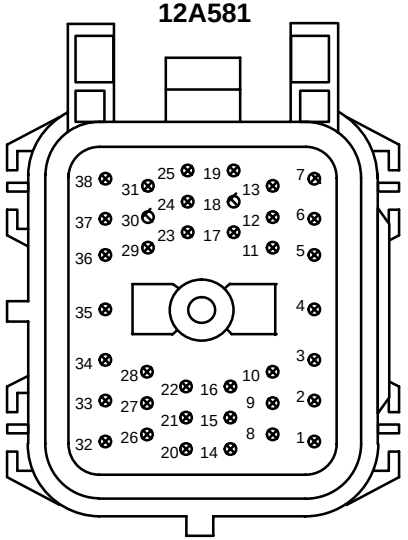

(1) 1093 (TN/RD)
(2) 1093 (TN/RD)
325 (DB/OG)
(3) 1138 (VT/WH)
(4) 924 (BN/OG)
(5) 779 (BN)
(6) 387 (RD/WH)
(7) 388 (YE/LB)
(8) 1202 (BN/LG)
(9) 136 (DB/YE)
(10) 1144 (YE/BK)
(11) 199 (LB/YE)
1000 (RD/BK)
(12) 199 (LB/YE)
(13) 1145 (LB/BK)
(14) 359 (GY/RD)
(15) 389 (WH/BK)
(16) 390 (TN/YE)
(17) 392 (RD/LG)
(18) 393 (VT/LG)
(19) 1497 (PK/BK)
(20) 1496 (PK)
(21) 783 (GY)
(22) 784 (LB/BK)
(23) 971 (PK/BK)
(24) 970 (DG/WH)
(25) 1143 (WH/BK)
(26) 463 (RD/WH)
(27) –
(28) 57 (BK)
(29) 923 (OG/BK)
(30) 74 (GY/LB)
(31) 94 (RD/BK)
(32) 140 (BK/PK)
(33) 237 (OG/YE)
(34) 295 (LB/PK)
(35) 315 (VT/OG)
(36) 480 (VT/YE)
(37) 925 (WH/YE)
(38) 391 (RD/YE)

C111

12B637

P66
Coil On Plug (COP)
1 (12029)



F02109

Pin	Circuit	Circuit function
1	16 (RD/LG)	Voltage supplied in Start and Run (overload protected)
2	1024 (LG/WH)	Coil On Plug (COP) 1 (12029), control

C112

12B637

P67
Coil On Plug (COP)
2 (12029)



F02109

Pin	Circuit	Circuit function
1	16 (RD/LG)	Voltage supplied in Start and Run (overload protected)
2	1026 (PK/WH)	Coil On Plug (COP) 2 (12029), control