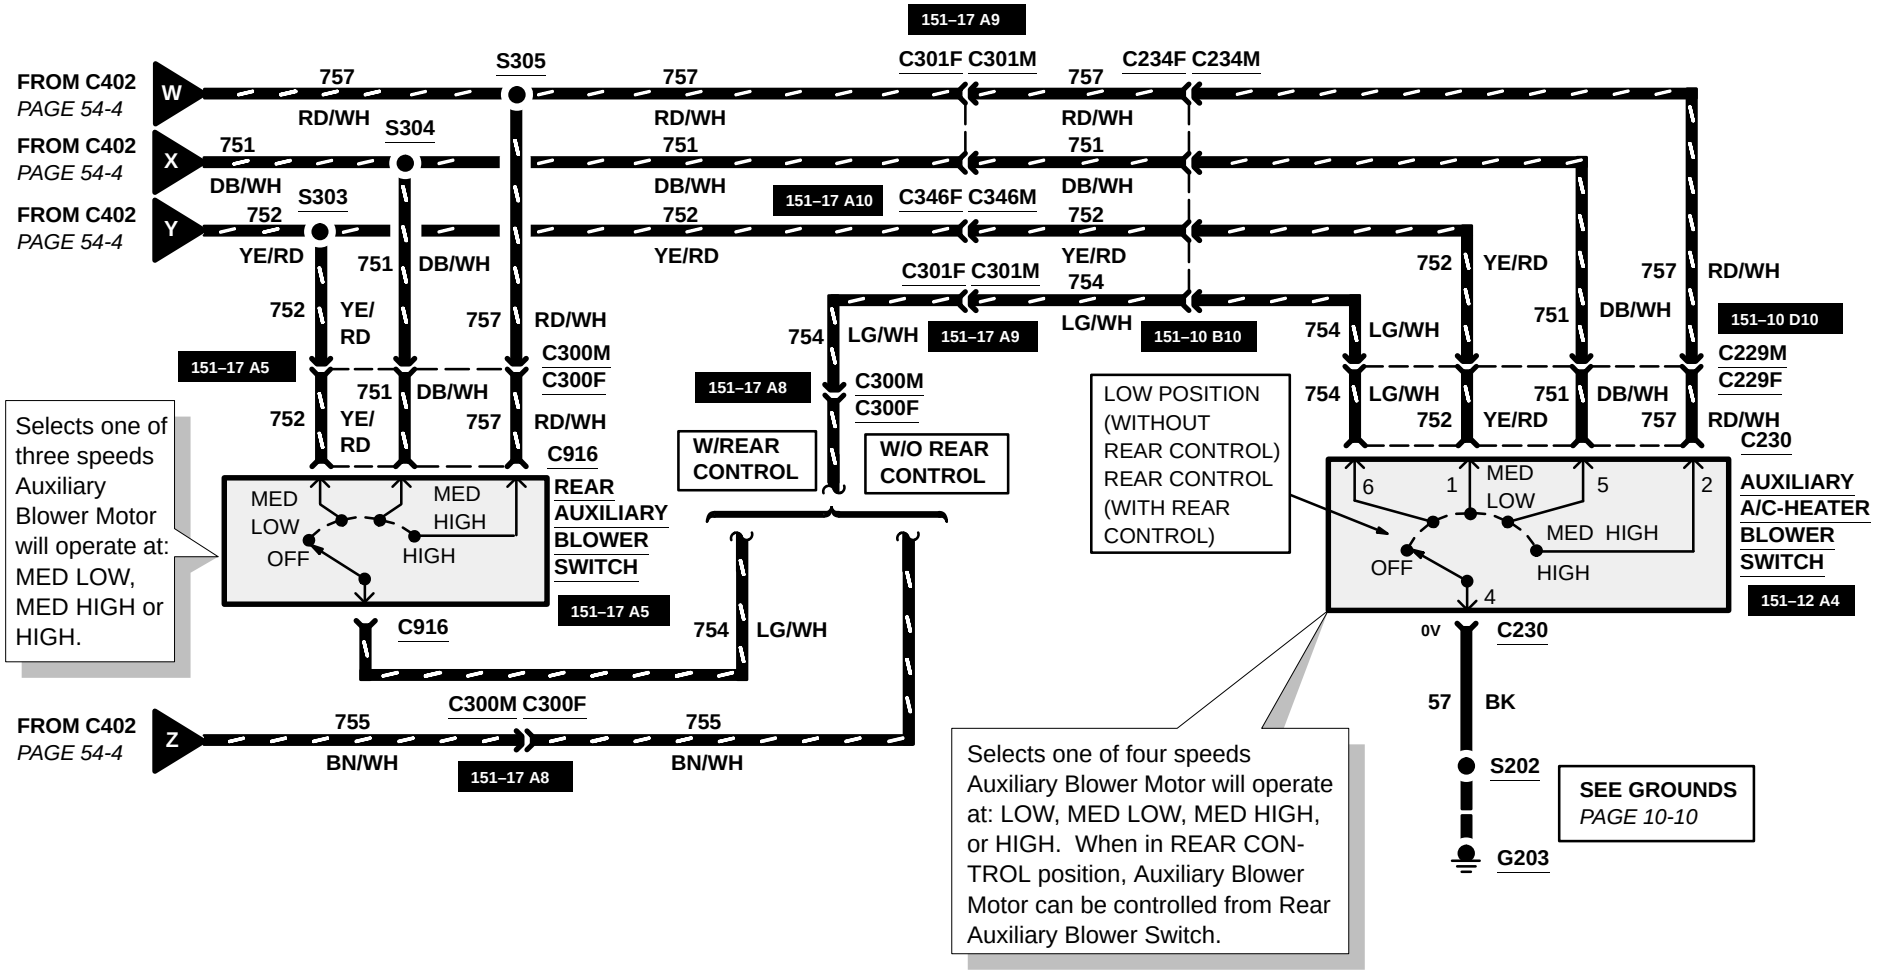
FROM C402
PAGE 54-4
W
X
Y
Z
757
RD/WH
751
DB/WH
752
YE/RD
754
LG/WH
755
BN/WH
S305
S304
S303
151–17 A9
C301F C301M
C234F C234M
151–17 A10
C346F C346M
151–17 A5
151–17 A8
151–10 B10
151–10 D10
C300M
C300F
C916
C229M
C229F
C230
REAR AUXILIARY BLOWER SWITCH
AUXILIARY A/C-HEATER BLOWER SWITCH
151–12 A4
MED LOW
MED HIGH
HIGH
OFF
W/REAR CONTROL
W/O REAR CONTROL
LOW POSITION (WITHOUT REAR CONTROL)
REAR CONTROL (WITH REAR CONTROL)
6
1
5
2
4
0V
57 BK
S202
G203
SEE GROUNDS
PAGE 10-10
Selects one of three speeds Auxiliary Blower Motor will operate at: MED LOW, MED HIGH or HIGH.
Selects one of four speeds Auxiliary Blower Motor will operate at: LOW, MED LOW, MED HIGH, or HIGH. When in REAR CONTROL position, Auxiliary Blower Motor can be controlled from Rear Auxiliary Blower Switch.