C341b

14A699

Driver seat module
(14C718)



F02032

Pin	Circuit	Circuit function
1	566 (DG)	Voltage supplied at all times (overload protected)
2	57 (BK)	Ground

C341c

14A005

Driver seat module
(14C718)



F10135

Pin	Circuit	Circuit function
1	109 (VT/WH)	Voltage supplied at all times (overload protected)
2	693 (OG)	UBP Diagnostics
3	268 (BK/OG)	Memory set switch (14776)
4	267 (BN/LG)	Memory set switch (14776)
5	270 (BN/OG)	Memory set switch (14776)
6	676 (PK/OG)	logic ground
7	1491 (LB/YE)	Accelerator pedal position sensor monitor
8	1493 (PK/BK)	Adjustable pedal switch input
9	1492 (LB/RD)	Adjustable pedal switch input
10	272 (WH/OG)	Memory set switch (14776), Switch illumination

C349

14B079

Rear Integrated
Control Panel
(RICP) (19980)

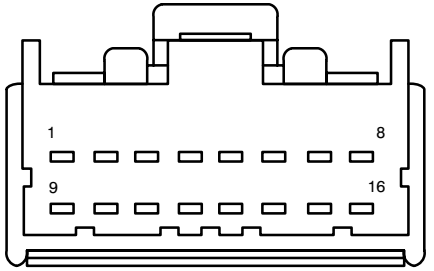

F16118

Pin	Circuit	Circuit function
1	825 (TN/LG)	Speaker, right rear (18808) +
2	802 (OG/RD)	Speaker, right rear (18808) +
3	803 (BN/PK)	Speaker, right rear (18808) –
4	–	not used
5	801 (TN/YE)	Speaker, left rear (18808) –
6	800 (GY/LB)	Speaker, left rear (18808) +
7	827 (TN/WH)	Speaker, left rear (18808) +
8	–	not used
9	1068 (LG/BK)	Audio System ON (ASYSON)
10	829 (WH/VT)	Voltage supplied at all times (overload protected)
11	694 (BK/LG)	Ground
12	832 (LB/PK)	Audio corporate protocol A
13	833 (TN)	Audio corporate protocol B
14	–	not used
15	57 (BK)	Illumination, Ground
16	19 (LB/RD)	Instrument illumination