EXCURSION

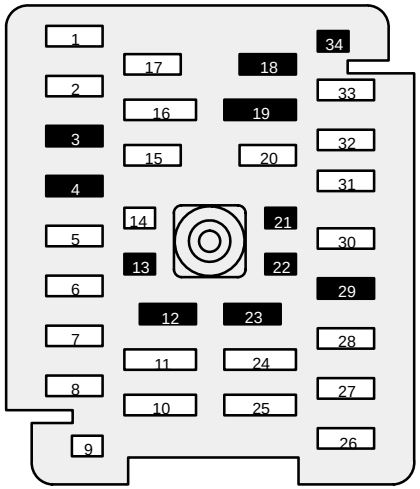

C242a

CENTRAL JUNCTION BOX

PIN	CIRCUIT	CIRCUIT FUNCTION	PIN	CIRCUIT	CIRCUIT FUNCTION
1	10 (LG/RD)	Brake Pressure Switch/Flasher Relay	18	–	NOT USED
2	10 (LG/RD)	Brake Pedal Position (BPP) Switch	19	–	NOT USED
3	–	NOT USED	20	53 (BK/LB)	Running Board Lamp Feed
4	–	NOT USED	21	–	NOT USED
5	12 (LG/BK)	Headlamp Dimmer Switch to High Beams	22	–	NOT USED
6	640 (RD/YE)	(PATS) Transceiver Power	23	–	NOT USED
7	829 (WH/VT)	RICP and CD Changer Power	24	996 (OG/WH)	Left Window Switch Current Sense (LOW) to GEM
8	1002 (BK/PK)	Fused Ignition RUN/ACC to GEM			
9	402 (OG/LG)	Interior Lamp Switch to GEM	25	170 (RD/LB)	Fused Power Feed to Central Junction Box
10	400 (LB/BK)	Power Feed to Left and Right Window Switch	26	66 (LB)	Fused Window Lock Switch Illumination
			27	797 (LG/VT)	Audio Power
11	460 (YE/LB)	Power Feed to Horn	28	40 (LB/WH)	Fused Power Supply Feed
12	–	NOT USED	29	–	NOT USED
13	–	NOT USED	30	632 (GY/OG)	Dimmer Switch to High Beams
14	298 (VT/OG)	Blower Motor Relay Coil Feed	31	1 (DB)	Horn Relay Coil
15	294 (WH/LB)	Customer Access Hot in Run	32	729 (RD/WH)	Instrument Cluster Memory
16	297 (BK/LG)	Fused Ignition RUN/ACC Feed	33	53 (BK/LB)	Overhead Interior Lamp Feed
17	400 (LB/BK)	Window Lock Illumination	34	–	NOT USED