## C135

**14290**

A7
ABS control module
(2C219)

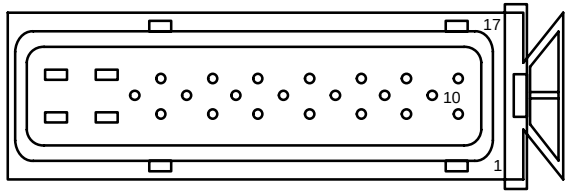


F25007

| Pin | Circuit | Circuit Function |
|---|---|---|
| 1 | – | not used |
| 2 | 29S-CF58 (OG/GN) | Voltage supplied at all times (overload protected), Switched |
| 3 | 8-CF38 (WH/RD) | Sensor signal |
| 4 | 7-CF38 (YE/RD) | Voltage D.C. supplied at all times (sensor) |
| 5 | – | not used |
| 6 | 7-CF40 (YE/GN) | Voltage D.C. supplied at all times (sensor) |
| 7 | 8-CF40 (WH/GN) | Sensor signal |
| 8 | 31-CF6 (BK) | Ground |
| 9 | 30-CF13 (RD) | Voltage supplied at all times (not overload protected) |
| 10 | 5-CF6 (BU) | Data link, bus negative |
| 11 | 4-CF6 (GY) | Data link, bus positive |
| 12 | – | not used |

| Pin | Circuit | Circuit Function |
|---|---|---|
| 13 | – | not used |
| 14 | 8-CF54 (WH/VT) | Sensor signal |
| 15 | 31S-CF45 (BK/GN) | Ground, Switched |
| 16 | – | not used |
| 17 | 8-CF32 (WH) | Sensor signal |
| 18 | 7-CF32 (YE) | Voltage D.C. supplied at all times (sensor) |
| 19 | – | not used |
| 20 | 20-CF6 (PK/YE) | Voltage, hot in run only |
| 21 | 8-CF34 (WH/BU) | Sensor signal |
| 22 | 7-CF34 (YE/BU) | Voltage D.C. supplied at all times (sensor) |
| 23 | 4-EE6 (GY) | Data link, bus positive |
| 24 | 31-CF6 (BK) | Ground |
| 25 | 30-CF6 (RD) | Voltage supplied at all times (not overload protected) |