4R100

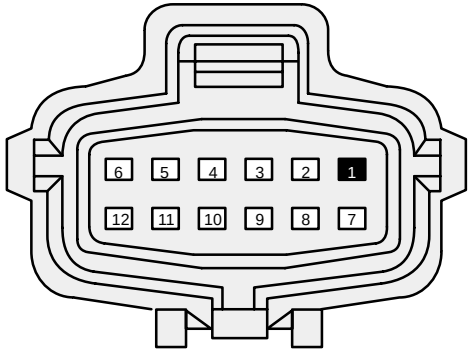

C182 (BLACK)

DIGITAL TRANSMISSION RANGE (DTR) SENSOR

PIN	CIRCUIT	CIRCUIT FUNCTION
1	–	NOT USED
2	359 (GY/RD)	Signal Return
3	199 (LB/YE)	TR3A
4	1144 (YE/BK)	TR1
5	1145 (LB/BK)	TR2
6	1143 (WH/BK)	TR4
7	57 (BK)	Ground
8	463 (RD/WH)	(Neutral) for 4X4 Low
9	295 (LB/PK)	Power
10	325 (DB/OG)	Starter Control
11	140 (BK/PK)	Reversing Lamp Feed
12	1093 (TN/RD)	Starter Motor Relay

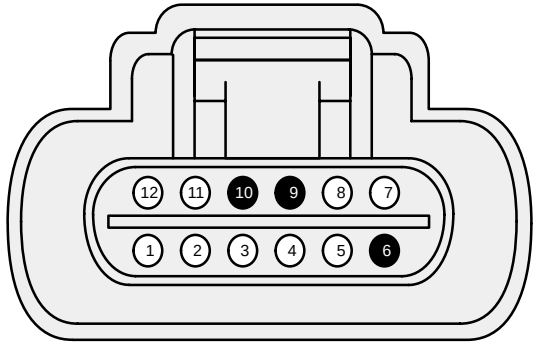

C193 (BLACK)

4R100 TRANSMISSION

PIN	CIRCUIT	CIRCUIT FUNCTION
1	1138 (VT/WH)	Power from PCM Relay
2	315 (VT/OG)	Shift Solenoid B
3	237 (OG/YE)	Shift Solenoid A
4	480 (VT/YE)	Torque Converter Clutch (TCC) Control Solenoid
5	924 (BN/OG)	Coast Clutch Solenoid
6	–	NOT USED
7	923 (OG/BK)	Transmission Fluid Temperature (TFT) Sensor
8	359 (GY/RD)	Sensor Signal Return
9	–	NOT USED
10	–	NOT USED
11	925 (WH/YE)	Electronic Pressure Control (EPC) Solenoid
12	1138 (VT/WH)	Power from PCM Relay