C4085

18W862

A403
Vehicle Dynamic
Module (VDM)

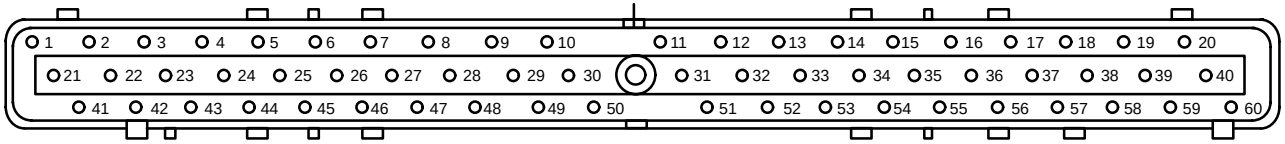

F60001

Pin	Circuit	Circuit Function
1	1050 (LG/VT)	Voltage in Run (overload protected)
2	–	not used
3	–	not used
4	–	not used
5	427 (PK/BK)	Height sensor, left rear, input
6	–	not used
7	–	not used
8	–	not used
9	424 (TN)	Height sensor, right front, input
10–14	–	not used
15	426 (RD/BK)	Reference voltage
16	–	not used
17	–	not used
18	915 (PK/LB)	SCP Bus –
19	914 (TN/OG)	SCP Bus +
20–26	–	not used
27	422 (PK/BK)	Height sensor, left front, input
28	–	not used
29	–	not used
30	–	not used
31	114 (LB/YE)	Vehicle Dynamic Module (VDM), to, Power steering valve solenoid (3783)
32	–	not used
33	–	not used
34	–	not used
35	420 (DB/Y)	Air suspension solid state relay (2C013)
36	418 (DG/YE)	Voltage supplied at all times (overload protected)

Pin	Circuit	Circuit Function
37	418 (DG/YE)	Voltage supplied at all times (overload protected)
38	416 (LB/BK)	Shock absorber solenoid valve, right rear (5A891)
39	–	not used
40	875 (BK/LB)	Ground
41	429 (P/LG)	Shock absorber solenoid valve, left rear (5A891)
42	421 (PK)	Vehicle Emergency Message System (VEMS) module, to, Air suspension compressor assembly
43	428 (OG/PK)	Height sensor, right rear, input
44	–	not used
45	–	not used
46	432 (BK/PK)	Signal return
47	–	not used
48	425 (BN/PK)	Air suspension disable switch, switched power
49	–	not used
50	–	not used
51	840 (WH/BK)	Shock actuator, left front
52	843 (WH)	Shock actuator, right rear
53	841 (WH/RD)	Shock actuator, right front
54	842 (WH/OG)	Shock actuator, left rear
55	115 (LG/BK)	Vehicle Dynamic Module (VDM), to, Power steering valve solenoid (3783)
56	418 (DG/YE)	Voltage supplied at all times (overload protected)
57	418 (DG/YE)	Voltage supplied at all times (overload protected)
58	418 (DG/YE)	Voltage supplied at all times (overload protected)
59	–	not used
60	875 (BK/LB)	Ground