* with EATC
** Early production
*** Late production

C270e (BK)

14401

Central Junction
Box (CJB)
(14A068)

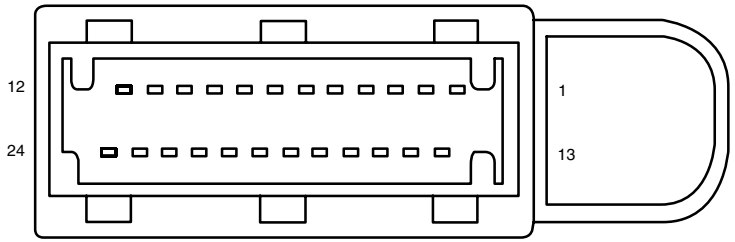

F24031

Pin	Circuit	Circuit function
1	294 (WH/LB)	Voltage supplied in Start and Run (overload protected)
2	14 (BN)	Power, Exterior lamps
3	295 (LB/PK)	Voltage supplied in Start and Run (overload protected)
4	–	not used
5	–	not used
6	–	not used
7	–	not used
8	–	not used
9	57 (BK)	Ground
10	1005 (VT/OG)	Battery saver relay, control
11	–	not used
12	1 (DB)	Horn relay, control
13	**1499 (PK/LG)	Accessory delay relay, output
	***194 (PK)	Accessory delay relay, output

Pin	Circuit	Circuit function
14	1003 (GY/YE)	Voltage supplied in Start and Run (overload protected)
15	9 (LG/OG)	Turn lamps, feed, left rear
16	729 (RD/WH)	Voltage supplied at all times (overload protected)
17	1044 (WH/YE)	Voltage supplied in Start and Run (overload protected)
18	5 (OG/LB)	Turn lamps, feed, right rear
19	753 (YE/RD)	Blower motor relay, control
	*461 (OG)	Front blower motor relay, control
20	**140 (BK/PK)	Voltage supplied in reverse
	***963 (BK/LG)	Trailer tow relay, reversing lamp, output
21	1332 (LB)	Accessory delay relay, control
22	1009 (OG/YE)	Rear window defrost relay, control
23	296 (WH/VT)	Voltage supplied in Start and Run (overload protected)
24	1000 (RD/BK)	Voltage supplied in Start (overload protected)