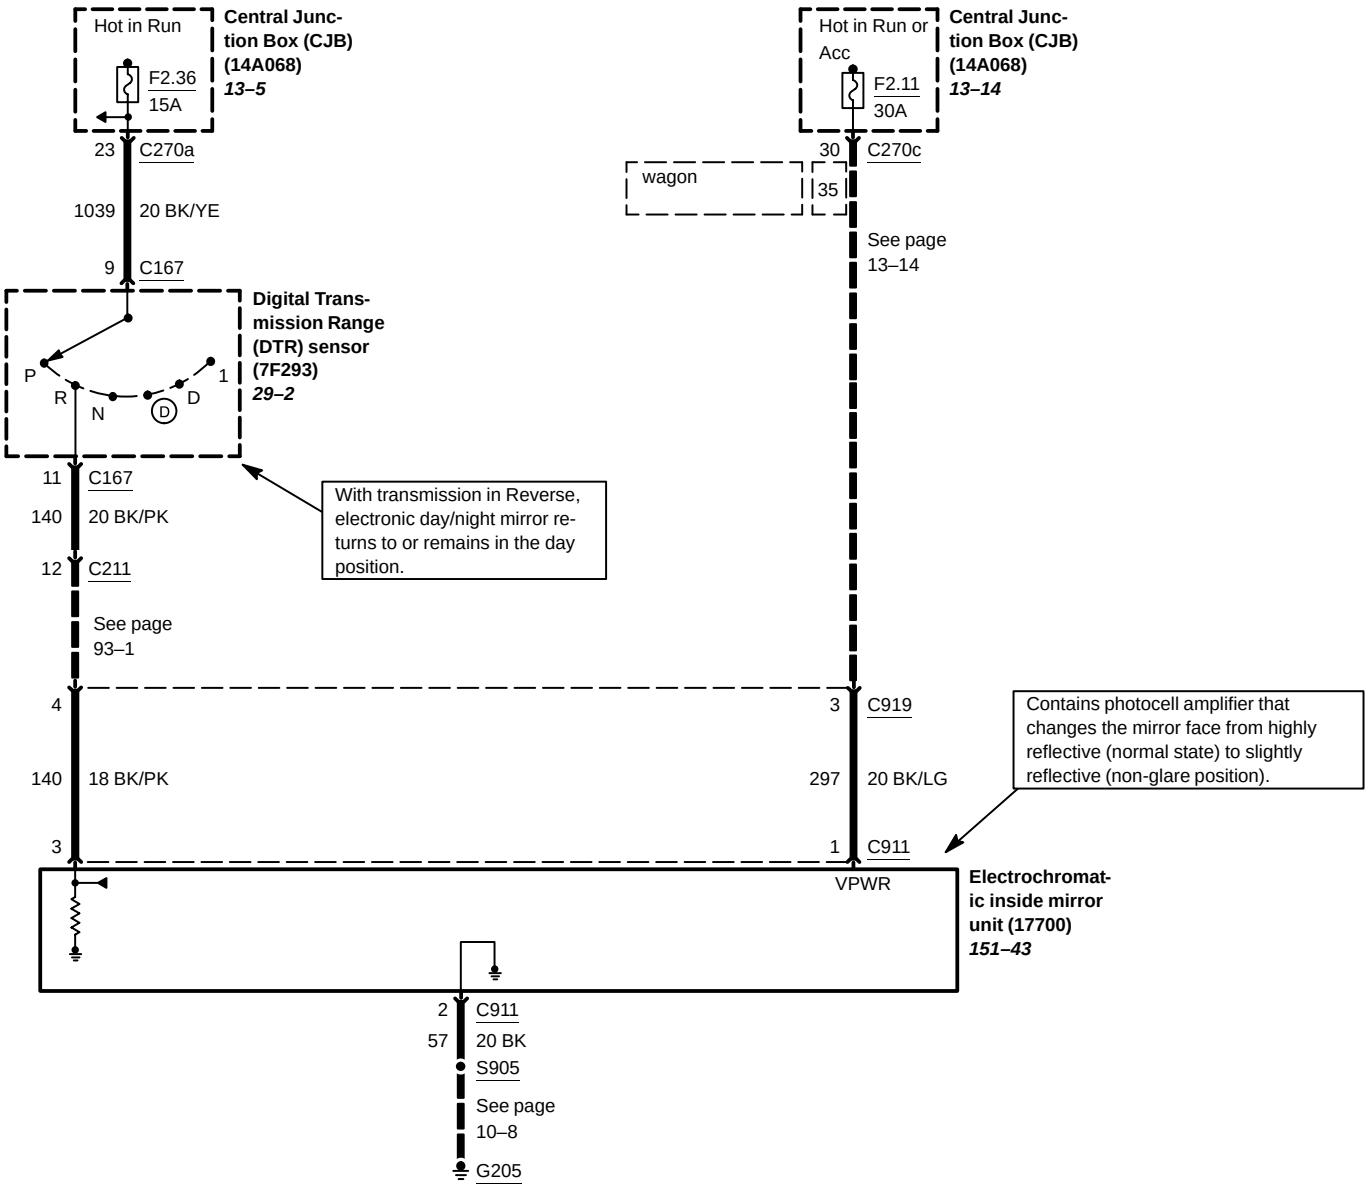
Hot in Run
Central Junction Box (CJB) (14A068) 13–5
F2.36
15A
23
C270a
1039
20 BK/YE
9
C167
Digital Transmission Range (DTR) sensor (7F293) 29–2
P
R
N
D
1
D
11
C167
140
20 BK/PK
12
C211
See page 93–1
With transmission in Reverse, electronic day/night mirror returns to or remains in the day position.
Hot in Run or Acc
Central Junction Box (CJB) (14A068) 13–14
F2.11
30A
30
C270c
wagon
35
See page 13–14
4
140
18 BK/PK
3
3
C919
297
20 BK/LG
1
C911
VPWR
Contains photocell amplifier that changes the mirror face from highly reflective (normal state) to slightly reflective (non-glare position).
Electrochromatic inside mirror unit (17700) 151–43
2
C911
57
20 BK
S905
See page 10–8
G205