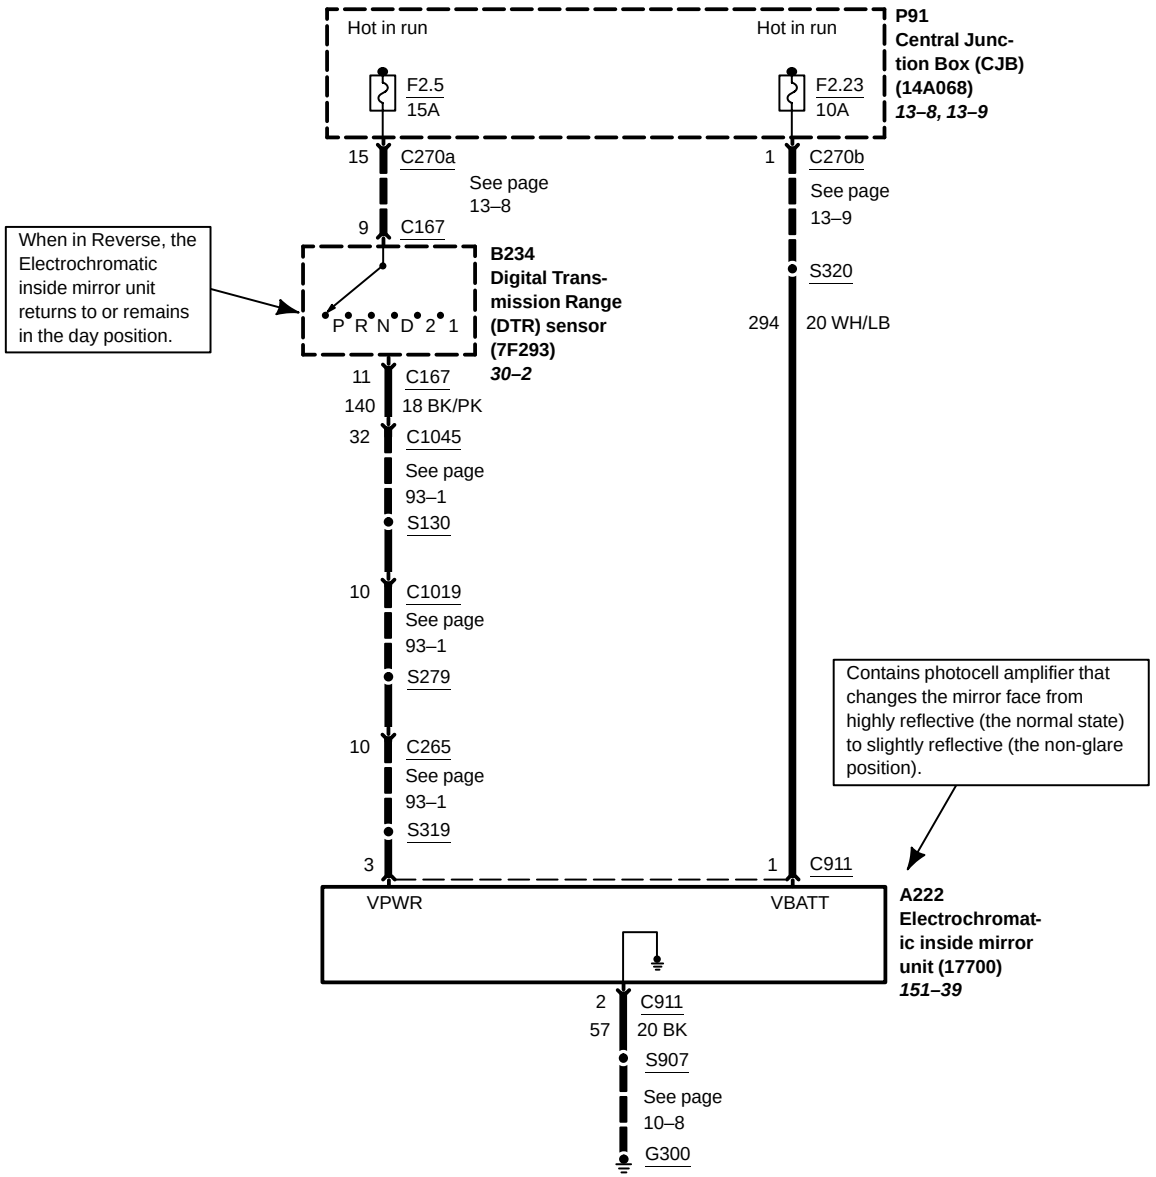
Hot in run
Hot in run
P91
Central Junction Box (CJB)
(14A068)
13–8, 13–9
F2.5
15A
F2.23
10A
15
C270a
See page 13–8
1
C270b
See page 13–9
9
C167
When in Reverse, the Electrochromatic inside mirror unit returns to or remains in the day position.
B234
Digital Transmission Range (DTR) sensor
(7F293)
30–2
P R N D 2 1
S320
294
20 WH/LB
11
C167
140
18 BK/PK
32
C1045
See page 93–1
S130
10
C1019
See page 93–1
S279
10
C265
See page 93–1
S319
Contains photocell amplifier that changes the mirror face from highly reflective (the normal state) to slightly reflective (the non-glare position).
3
1
C911
VPWR
VBATT
A222
Electrochromatic inside mirror unit (17700)
151–39
2
C911
57
20 BK
S907
See page 10–8
G300