EXCURSION

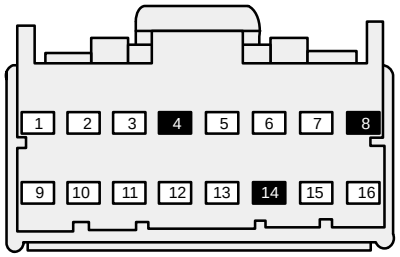

C266 (BLACK)

REAR INTEGRATED CONTROL PANEL (RICP)

PIN	CIRCUIT	CIRCUIT FUNCTION
1	825 (TN/LG)	RR Speaker Feed (+)
2	802 (OG/RD)	RR Speaker Signal (+)
3	803 (BN/PK)	RR Speaker Signal (–)
4	–	NOT USED
5	801 (TN/YE)	LR Speaker Signal (–)
6	800 (GY/LB)	LR Speaker Signal (+)
7	827 (TN/WH)	LR Speaker Amplifier Feed (+)
8	–	NOT USED
9	1068 (LG/BK)	ASYS On
10	829 (WH/VT)	Power (Hot at All Times)
11	694 (BK/LG)	Ground
12	832 (LB/PK)	Audio Corporate Protocol A
13	833 (TN)	Audio Corporate Protocol B
14	–	NOT USED
15	57 (BK)	Ground
16	19 (LB/RD)	Illumination