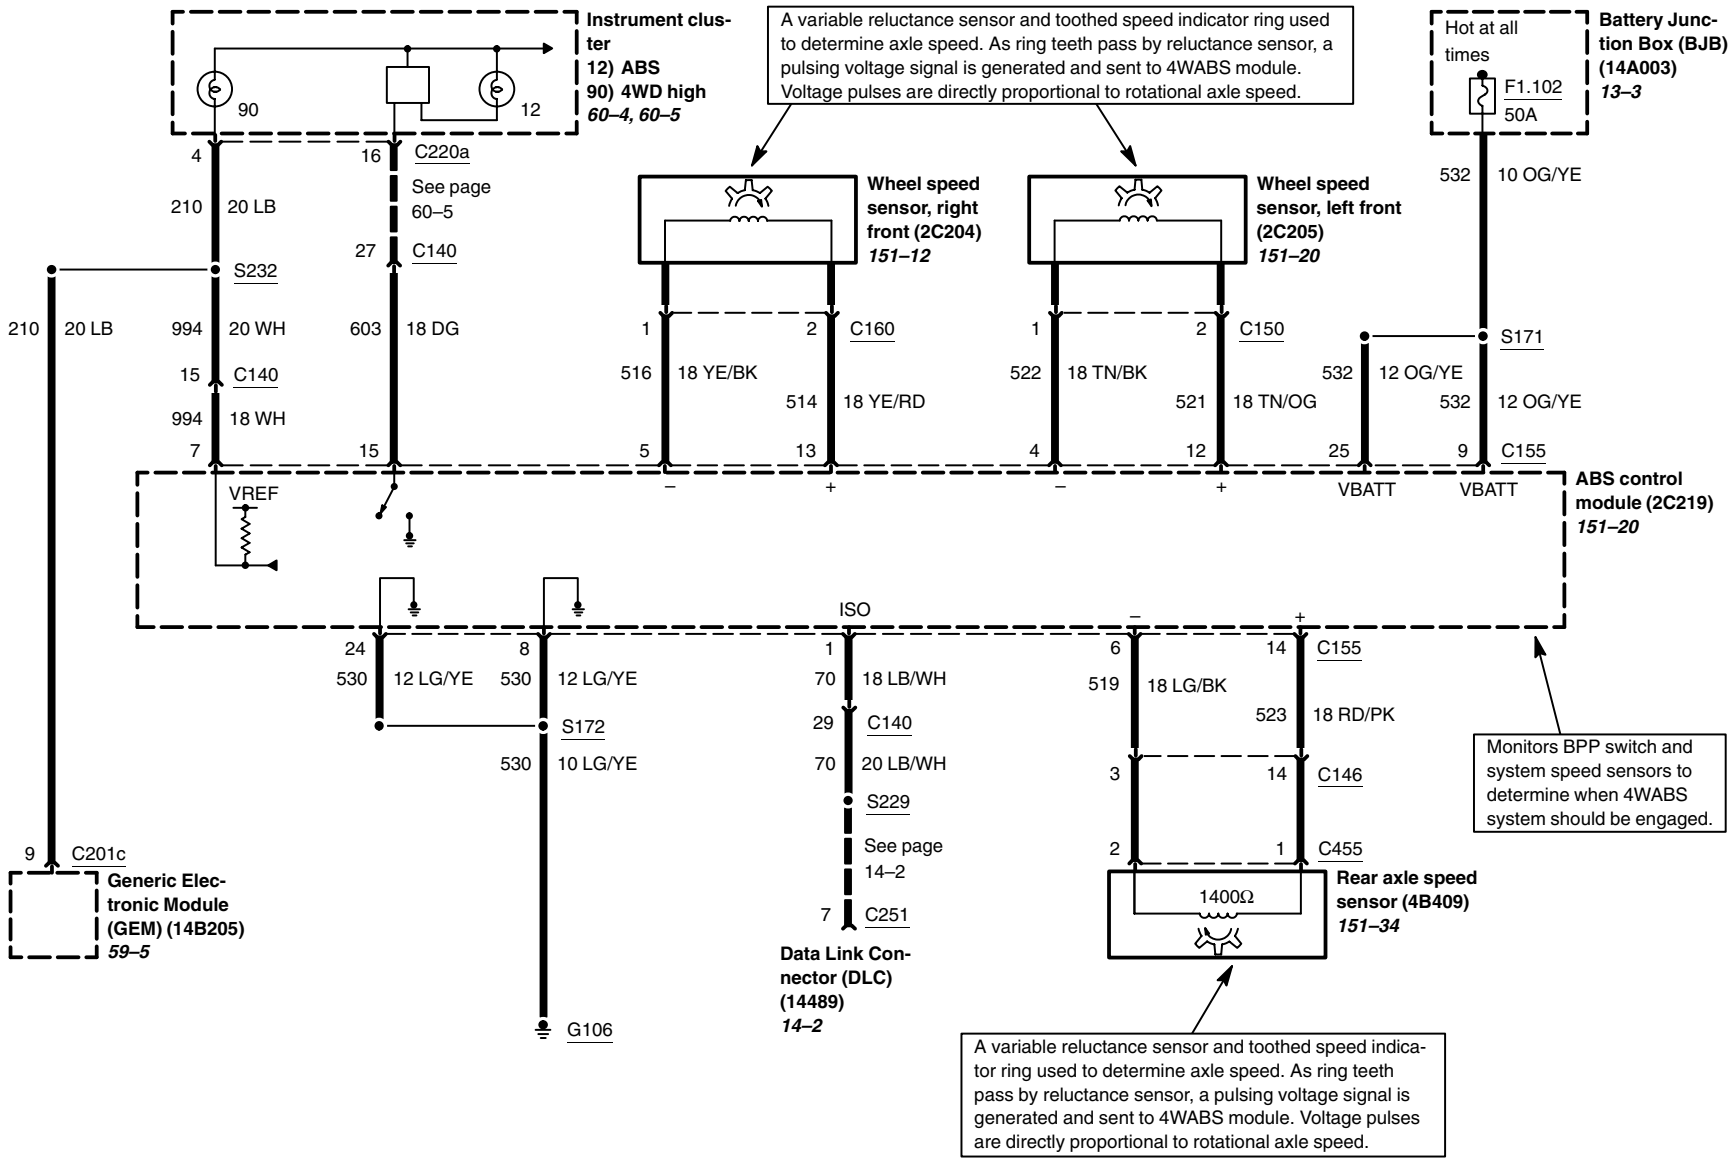
Instrument cluster
12) ABS
90) 4WD high
60–4, 60–5
90
12
A variable reluctance sensor and toothed speed indicator ring used to determine axle speed. As ring teeth pass by reluctance sensor, a pulsing voltage signal is generated and sent to 4WABS module. Voltage pulses are directly proportional to rotational axle speed.
Hot at all times
F1.102
50A
Battery Junction Box (BJB) (14A003)
13–3
4
210 20 LB
16
C220a
See page 60–5
27
C140
532 10 OG/YE
S232
Wheel speed sensor, right front (2C204)
151–12
Wheel speed sensor, left front (2C205)
151–20
210 20 LB
994 20 WH
603 18 DG
1
2
C160
516 18 YE/BK
514 18 YE/RD
1
2
C150
522 18 TN/BK
521 18 TN/OG
532 12 OG/YE
S171
532 12 OG/YE
15
C140
994 18 WH
7
15
5
13
4
12
25
9
C155
VREF
–
+
–
+
VBATT
VBATT
ABS control module (2C219)
151–20
ISO
–
+
24
530 12 LG/YE
8
530 12 LG/YE
1
70 18 LB/WH
6
519 18 LG/BK
14
C155
523 18 RD/PK
S172
530 10 LG/YE
29
C140
70 20 LB/WH
3
14
C146
Monitors BPP switch and system speed sensors to determine when 4WABS system should be engaged.
S229
See page 14–2
2
1
C455
9
C201c
7
C251
1400Ω
Rear axle speed sensor (4B409)
151–34
Generic Electronic Module (GEM) (14B205)
59–5
Data Link Connector (DLC) (14489)
14–2
G106
A variable reluctance sensor and toothed speed indicator ring used to determine axle speed. As ring teeth pass by reluctance sensor, a pulsing voltage signal is generated and sent to 4WABS module. Voltage pulses are directly proportional to rotational axle speed.