C281b

14401

A255
Four–wheel drive
control module

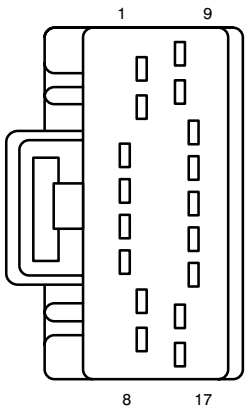

F17005

Pin	Circuit	Circuit function
1	435 (YE/LB)	signal, return
2	57 (BK)	Ground
	570 (BK/WH)	Ground
3	323 (LB/YE)	Neutral tow switch
4	762 (YE/WH)	Motor position 1
5	–	not used
6	783 (GY)	Four–wheel drive, indicator, High
7	764 (BN/WH)	Motor position 3
8	–	not used
9	784 (LB/BK)	Four–wheel drive, indicator, Low
10	–	not used
11	–	not used
12	679 (GY/BK)	Vehicle Speed Sensor (VSS) +
13	763 (OG/WH)	Motor position 2
14	–	not used
15	–	not used
16	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
17	–	not used

C282 (GY)

14401

N316
Inertia Fuel Shutoff
(IFS) switch
(9D362)



F03032

Pin	Circuit	Circuit function
1	238 (DG/YE)	Fuel pump relay, switched power, output
2	787 (PK/BK)	Fuel pump, Power
3	–	not used

C284 (GY)

14401

N141
Four–wheel drive
switch



F04027

Pin	Circuit	Circuit function
1	235 (RD/BK)	Instrument illumination, input
2	465 (WH/LB)	Four–wheel drive control module, to Four–wheel drive switch
3	435 (YE/LB)	signal, return
4	57 (BK)	Ground