

C146

12A581



14405




(1) 140 (BK/PK)
(2) 14 (BN)
(3) 789 (BN/WH)
(4)
(5) 511 (LG)
(6) 787 (PK/BK)
(7)
(8)
(9) 53 (BK/LB)
(10) 52 (YE)
(11)
(12)
(13)
(14) 64 (DG)
(15) 5 (OG/LB)
(16) 9 (LG/OG)

C150

12A581

Wheel speed sensor, left front (2C205)




Pin	Circuit	Circuit function
1	522 (TN/BK)	Wheel speed sensor, left front (2C205) –
2	521 (TN/OG)	Wheel speed sensor, left front (2C205) +

C155a

12A581

ABS control module (2C219)

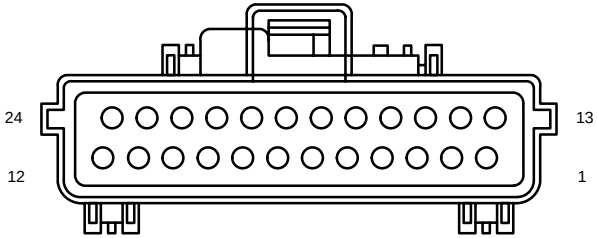

Pin	Circuit	Circuit function
1	603 (DG)	Anti–lock brake indicator, control
2	–	not used
3	–	not used
4	–	not used
5	70 (LB/WH)	ISO Bus
6	–	not used
7	512 (TN/LG)	Brake indicator, prove–out
8	523 (RD/PK)	Wheel speed sensor, right rear +
9	518 (LG/RD)	Wheel speed sensor, left rear +
	523 (RD/PK)	Rear axle speed sensor (4B409) +
10	514 (YE/RD)	Wheel speed sensor, right front (2C204) +
11	521 (TN/OG)	Wheel speed sensor, left front (2C205) +
12	–	not used
13	–	not used
14	533 (TN/RD)	Voltage in Run (overload protected)
15	810 (RD/LG)	Brake pedal position switch (13480), output
16	–	not used
17	–	not used
18	–	not used
19	–	not used
20	524 (PK/BK)	Wheel speed sensor, right rear –
21	519 (LG/BK)	Wheel speed sensor, left rear –
	519 (LG/BK)	Rear axle speed sensor (4B409) –
22	516 (YE/BK)	Wheel speed sensor, right front (2C204) –
23	522 (TN/BK)	Wheel speed sensor, left front (2C205) –
24	–	not used