C250

14401

N278
Ignition switch
(11572)

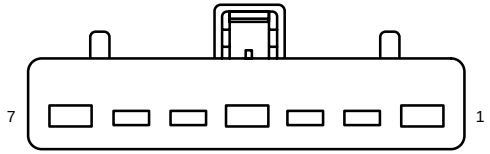

F07073

Pin	Circuit	Circuit function
1	1050 (LG/VT)	Voltage supplied in Start and Run (overload protected)
2	–	not used
3	1420 (YE/LB)	Key removal inhibit solenoid, Switched, Ground
4	32 (RD/LB)	Voltage supplied at all times (overload protected)
5	158 (BK/PK)	Key warning switch (11A127), input
6	297 (BK/LG)	Voltage in Run or Accessory (overload protected)
7	306 (TN/LB)	Voltage supplied in Start (overload protected)

C251

14401

D20
Data Link Connector
(DLC) (14489)

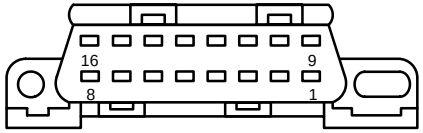

F16063

Pin	Circuit	Circuit function
1	–	not used
2	914 (TN/OG)	SCP Bus +
3	–	not used
4	57 (BK)	Ground
5	570 (BK/WH)	Ground
6	–	not used
7	70 (LB/WH)	ISO Bus
8	–	not used
9	–	not used
10	915 (PK/LB)	SCP Bus –
11	–	not used
12	–	not used
13	107 (VT)	Flash/EEPROM power supply
14	–	not used
15	–	not used
16	956 (OG/LG)	Voltage supplied at all times (overload protected)

C256

14401

A43
Passenger air bag
module (15044A74)



F02297

Pin	Circuit	Circuit function
A	607 (LB/OG)	Passenger air bag, feed, monitor
B	616 (PK/BK)	Passenger air bag, return