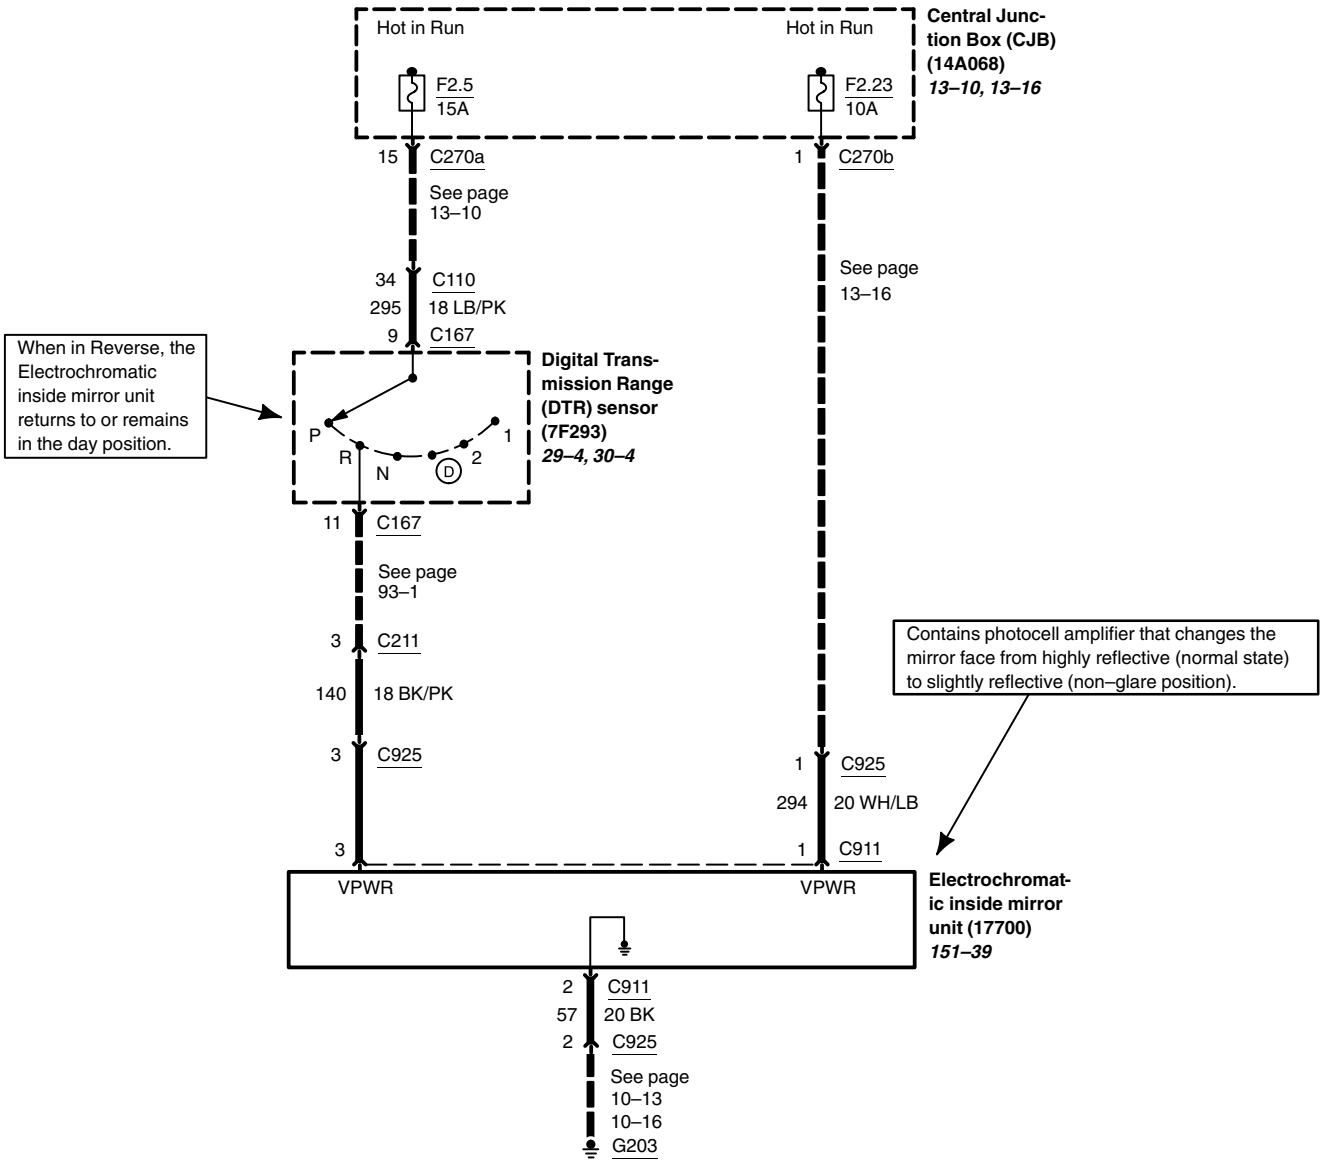
Hot in Run
Hot in Run
Central Junction Box (CJB) (14A068) 13–10, 13–16
F2.5 15A
F2.23 10A
15 C270a
1 C270b
See page 13–10
See page 13–16
34 C110
295 18 LB/PK
9 C167
When in Reverse, the Electrochromatic inside mirror unit returns to or remains in the day position.
Digital Transmission Range (DTR) sensor (7F293) 29–4, 30–4
P
R
N
D
1
2
11 C167
See page 93–1
3 C211
140 18 BK/PK
3 C925
Contains photocell amplifier that changes the mirror face from highly reflective (normal state) to slightly reflective (non–glare position).
1 C925
294 20 WH/LB
3
1 C911
VPWR
VPWR
Electrochromatic inside mirror unit (17700) 151–39
2 C911
57 20 BK
2 C925
See page 10–13
10–16
G203