C175b

7C078/7E443

A147
Powertrain Control
Module (PCM)
(12A650)

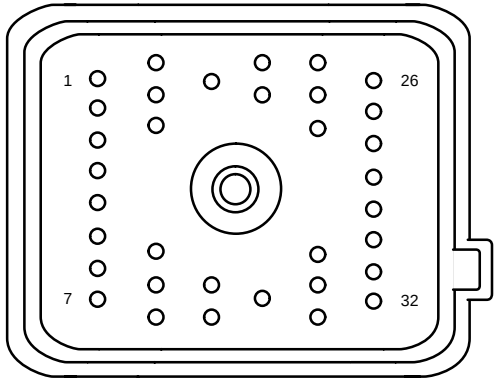

F32001

Pin	Circuit	Circuit function
1	237 (OG/YE)	Shift solenoid A
2	315 (VT/OG)	Shift solenoid B
3	971 (PK/BK)	Shift solenoid C
4	924 (BN/OG)	Shift solenoid D
5	480 (VT/YE)	Torque Converter Clutch (TCC) solenoid
6	–	not used
7	925 (WH/YE)	Electronic Pressure Control (EPC) solenoid
8	–	not used
9	199 (LB/YE)	Digital Transmission Range (DTR) sensor, TR3A
10	1143 (WH/BK)	Digital Transmission Range (DTR) sensor, TR4
11	–	not used
12	770 (WH)	Pressure Control (PCC) solenoid C
13	966 (LB/PK)	Pressure Control (PCB) solenoid B
14	–	not used
15	389 (WH/BK)	Heated Oxygen Sensor (HO2S) #12 (9G444), heater
16	390 (TN/YE)	Heated Oxygen Sensor (HO2S) #22 (9G444), heater

Pin	Circuit	Circuit function
17	359 (GY/RD)	signal, return
18	1145 (LB/BK)	Digital Transmission Range (DTR) sensor, TR2
19	–	not used
20	–	not used
21	324 (YE/LG)	Intermediate Shaft Speed (ISS) sensor (7H103)
22	1144 (YE/BK)	Digital Transmission Range (DTR) sensor, TR1
23	923 (OG/BK)	Transmission Fluid Temperature (TFT) sensor, input
24	–	not used
25	–	not used
26	136 (DB/YE)	Output Shaft Speed (OSS) sensor (7H103)
27	970 (DG/WH)	Turbine shaft speed sensor (7H103)
28	392 (RD/LG)	Heated Oxygen Sensor (HO2S) #12 (9G444), input
29	393 (VT/LG)	Heated Oxygen Sensor (HO2S) #22 (9G444), input
30	–	not used
31	–	not used
32	–	not used