C135

14290

ABS control module
(2C219)

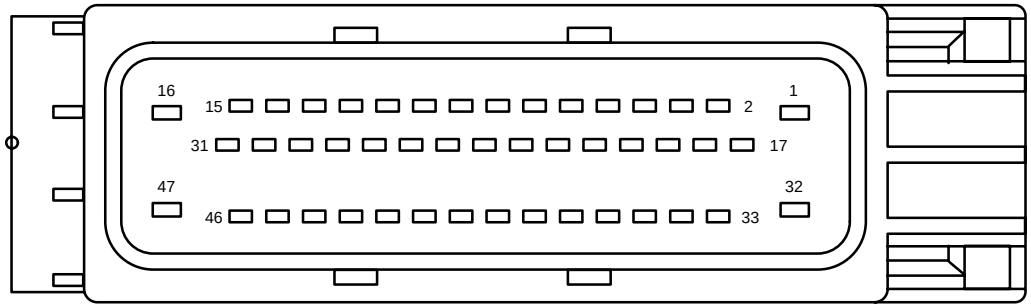

F47005

Pin	Circuit	Circuit function
1	30-CF13 (RD)	Voltage supplied at all times (not overload protected)
2	4-EE6 (GY)	Data link, bus positive
3	–	not used
4	20-CF6 (PK/YE)	Voltage, hot in run only
5	–	not used
6	–	not used
7	–	not used
8	–	not used
9	–	not used
10	–	not used
11	–	not used
12	4-CF6 (GY)	Data link, bus positive
13	31S-CF45 (BK/GN)	Ground, switch
14	5-CF6 (BU)	Data link, bus negative
15	–	not used
16	31-CF6 (BK)	Ground
17	–	not used
18	–	not used
19	–	not used
20	–	not used
21	–	not used
22	–	not used
23	–	not used
24	–	not used
25	–	not used
26	–	not used

Pin	Circuit	Circuit function
27	–	not used
28	–	not used
29	–	not used
30	–	not used
31	–	not used
32	30-CF6 (RD)	Voltage supplied at all times (not overload protected)
33	8-CF38 (WH/RD)	Sensor signal
34	7-CF38 (YE/RD)	Voltage DC supplied at all times (sensor)
35	–	not used
36	7-CF34 (YE/BU)	Voltage DC supplied at all times (sensor)
37	8-CF34 (WH/BU)	Sensor signal
38	8-CF54 (WH/VT)	Sensor signal
39	–	not used
40	–	not used
41	29S-CF58 (OG/GN)	Voltage supplied at all times (overload protected), switch
42	8-CF40 (WH/GN)	Sensor signal
43	7-CF40 (YE/GN)	Voltage DC supplied at all times (sensor)
44	–	not used
45	7-CF32 (YE)	Voltage DC supplied at all times (sensor)
46	8-CF32 (WH)	Sensor signal
47	31-CF6 (BK)	Ground