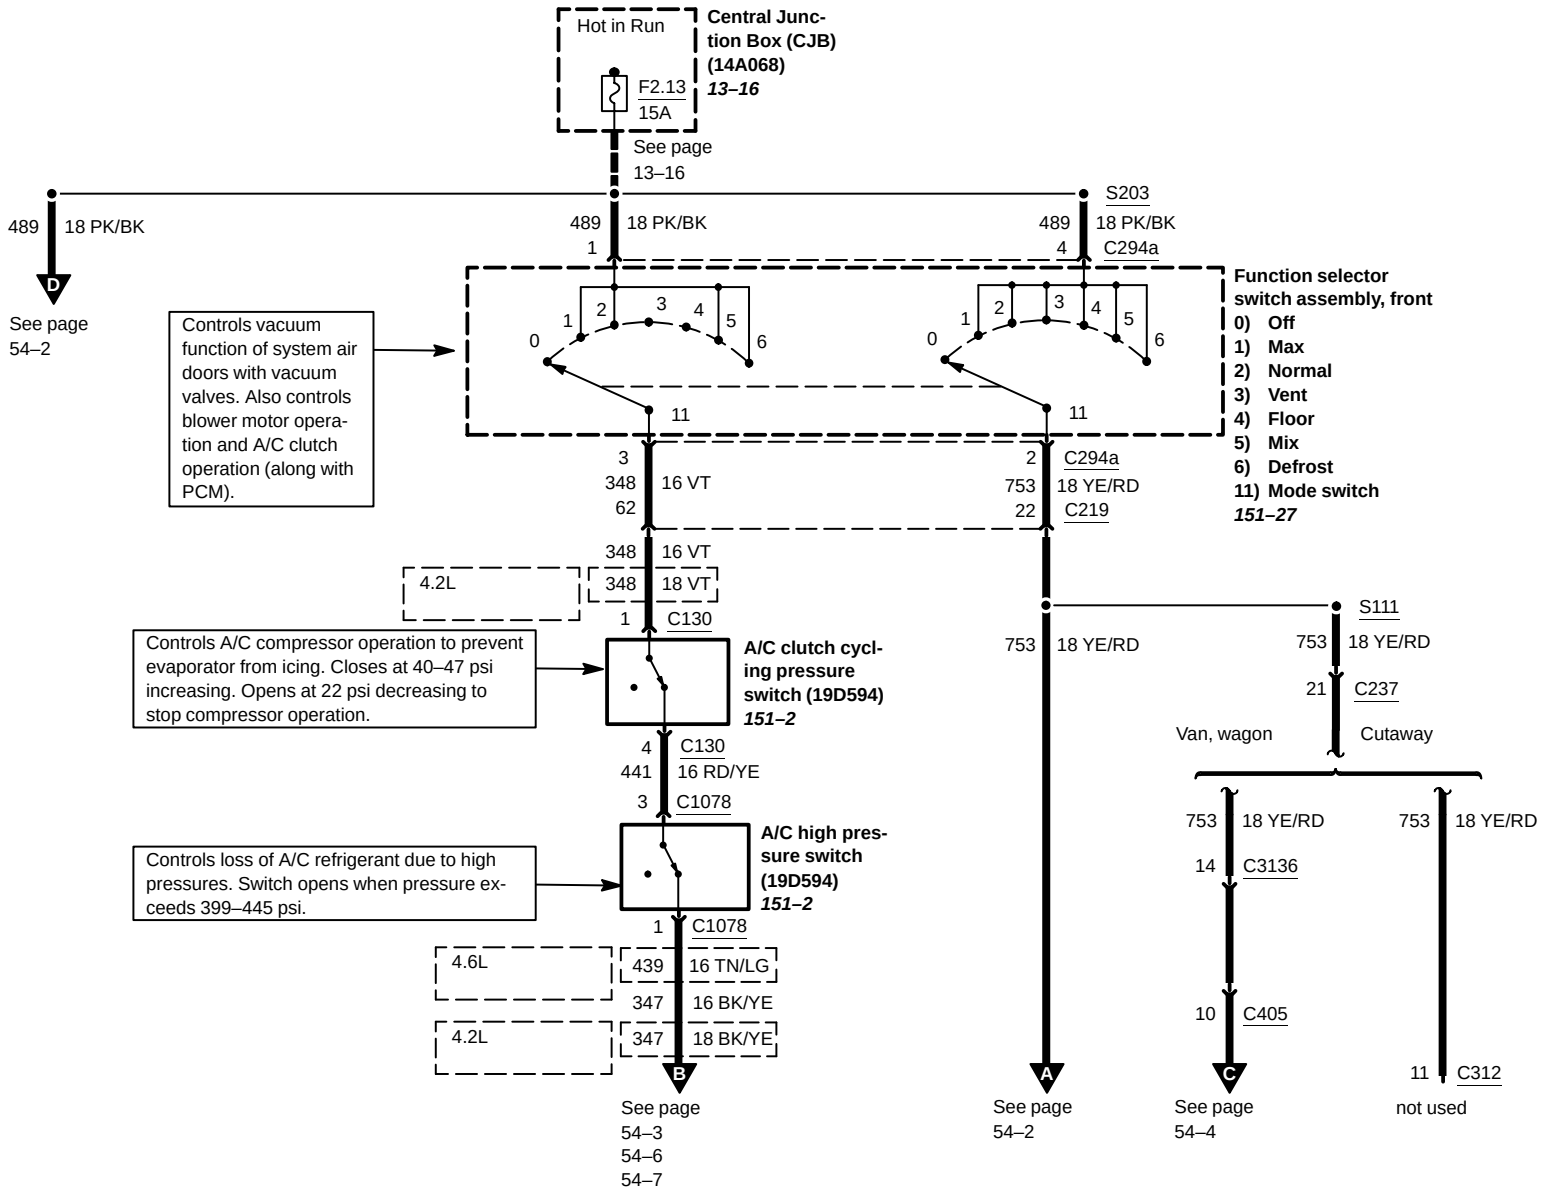
Hot in Run
Central Junction Box (CJB) (14A068) 13–16
F2.13
15A
See page 13–16
489 18 PK/BK
D
See page 54–2
489 18 PK/BK
1
S203
489 18 PK/BK
4
C294a
Function selector switch assembly, front
0) Off
1) Max
2) Normal
3) Vent
4) Floor
5) Mix
6) Defrost
11) Mode switch
151–27
Controls vacuum function of system air doors with vacuum valves. Also controls blower motor operation and A/C clutch operation (along with PCM).
11
11
3
348 16 VT
62
2
C294a
753 18 YE/RD
22
C219
348 16 VT
4.2L
348 18 VT
1
C130
753 18 YE/RD
S111
753 18 YE/RD
Controls A/C compressor operation to prevent evaporator from icing. Closes at 40–47 psi increasing. Opens at 22 psi decreasing to stop compressor operation.
A/C clutch cycling pressure switch (19D594) 151–2
21
C237
Van, wagon
Cutaway
4
C130
441 16 RD/YE
3
C1078
753 18 YE/RD
753 18 YE/RD
14
C3136
Controls loss of A/C refrigerant due to high pressures. Switch opens when pressure exceeds 399–445 psi.
A/C high pressure switch (19D594) 151–2
1
C1078
4.6L
439 16 TN/LG
347 16 BK/YE
4.2L
347 18 BK/YE
10
C405
11
C312
B
A
C
See page 54–3 54–6 54–7
See page 54–2
See page 54–4
not used