C220c

14401

A30
Instrument cluster

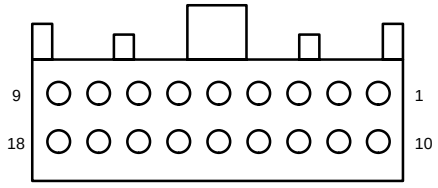

F18013

Pin	Circuit	Circuit Function
1	570 (BK/WH)	Ground
2	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
3	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
4	956 (OG/LG)	Voltage supplied at all times (overload protected)
5	57 (BK)	Ground
6	-	not used
7	914 (TN/OG)	SCP Bus +
8	915 (PK/LB)	SCP Bus -
9	919 (GY/BK)	Instrument illumination, feed
10	235 (RD/BK)	Front seats (power), input
11	-	not used
12	977 (VT/WH)	Brake indicator, control
13	-	not used
14	-	not used
15	2 (WH/LB)	Turn lamps, feed, right front
16	904 (LG/RD)	Generator/Battery indicator, control
17	253 (DG/WH)	Oil pressure switch, input
18	19 (LB/RD)	Voltage supplied at all times (overload protected)

C239

14405

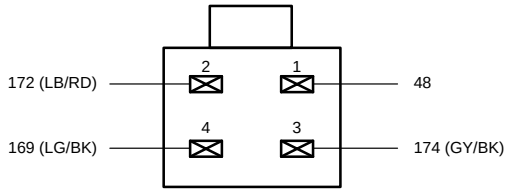

F04231

19B107

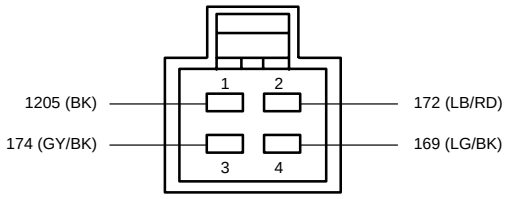

F04187

C241

14401

N10
Rear window defrost switch



F08060

Pin	Circuit	Circuit Function
1	1010 (DB/OG)	Rear window defrost switch, input
2	41 (BK/LB)	Voltage supplied in Start and Run (overload protected)
3	-	not used
4	57 (BK)	Ground
5	-	not used
6	186 (BN/LB)	Rear window defrost switch, Illumination, input
7	-	not used
8	19 (LB/RD)	Voltage supplied at all times (overload protected)