C289

14A005

M207
Fresh/recirculation door actuator
(19E616)



F06128

Pin	Circuit	Circuit function
1	1069 (OG/LB)	Electronic Automatic Temperature Control (EATC) module (19980)
2	–	not used
3	435 (YE/LB)	signal, return
4	438 (RD/WH)	Air temperature door variable resistor –
5	436 (RD/LG)	Air temperature door variable resistor +
6	660 (YE/LG)	Air temperature door variable resistor +

C290a

14401

A11
Radio (18806)

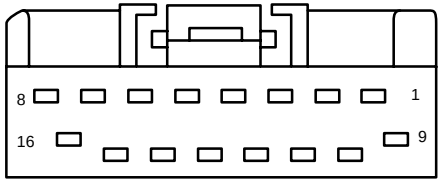

F16071

Pin	Circuit	Circuit function
1	484 (OG/BK)	Headlamp switch, on input
2	676 (PK/OG)	Vehicle Speed Sensor (VSS) –
3	689 (DB)	Hot in Start
4	651 (BK/YE)	clock select
5	802 (OG/RD)	Speaker, right rear (18808) +
6	803 (BN/PK)	Speaker, right rear (18808) –
7	805 (WH/LG)	Speaker, right front (18808) +
8	811 (DG/OG)	Speaker, right front (18808) –
9	828 (VT/LB)	Hot at all times
10	964 (DB/LG)	fused feed, Accessory
11	694 (BK/LG)	Ground
12	800 (GY/LB)	Speaker, left rear (18808) +
13	801 (TN/YE)	Speaker, left rear (18808) –
14	804 (OG/LG)	Speaker, left front (18808) +
15	813 (LB/WH)	Speaker, left front (18808) –
16	694 (BK/LG)	Ground