C228b

14401

A205
Electronic Automatic
Temperature Control
(EATC) module

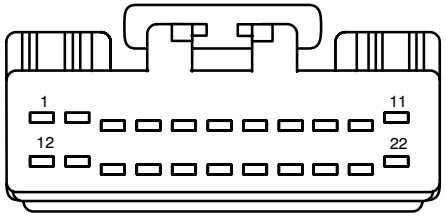

F22017

Pin	Circuit	Circuit Function
1	5-FA10 (BU/YE)	Data link, bus negative
2	31-FA10 (BK)	Ground
3	20-FA10 (PK/OG)	Voltage, hot in run only
4	–	not used
5	8-FA45 (WH/BU)	Sensor signal
6	8-FA51 (WH/BK)	Sensor signal
7	8-FA53 (WH/BU)	Sensor signal
8	9-FA49 (BN/WH)	Sensor signal return (reference/ground)
9	8-FA48 (WH/GN)	Sensor signal
10	8-FA44 (WH/RD)	Sensor signal
11	9-FA1 (BN/RD)	Sensor signal return (reference/ground)

Pin	Circuit	Circuit Function
12	4-FA10 (GY/BK)	Data link, bus positive
13	–	not used
14	29-FA10 (OG/GN)	Voltage supplied at all times (overload protected)
15	9-FA45 (BN/BU)	Sensor signal return (reference/ground)
16	9-FA44 (BN/RD)	Sensor signal return (reference/ground)
17	8-FA49 (WH/VT)	Sensor signal
18	8-FA47 (WH/GN)	Sensor signal
19	9-FA3 (BN/RD)	Sensor signal return (reference/ground)
20	10-FA53 (GY/VT)	Signal 2 (Y–direction, reverse, downward)
21	–	not used
22	7-FA1 (YE/RD)	Voltage D.C. supplied at all times (sensor)