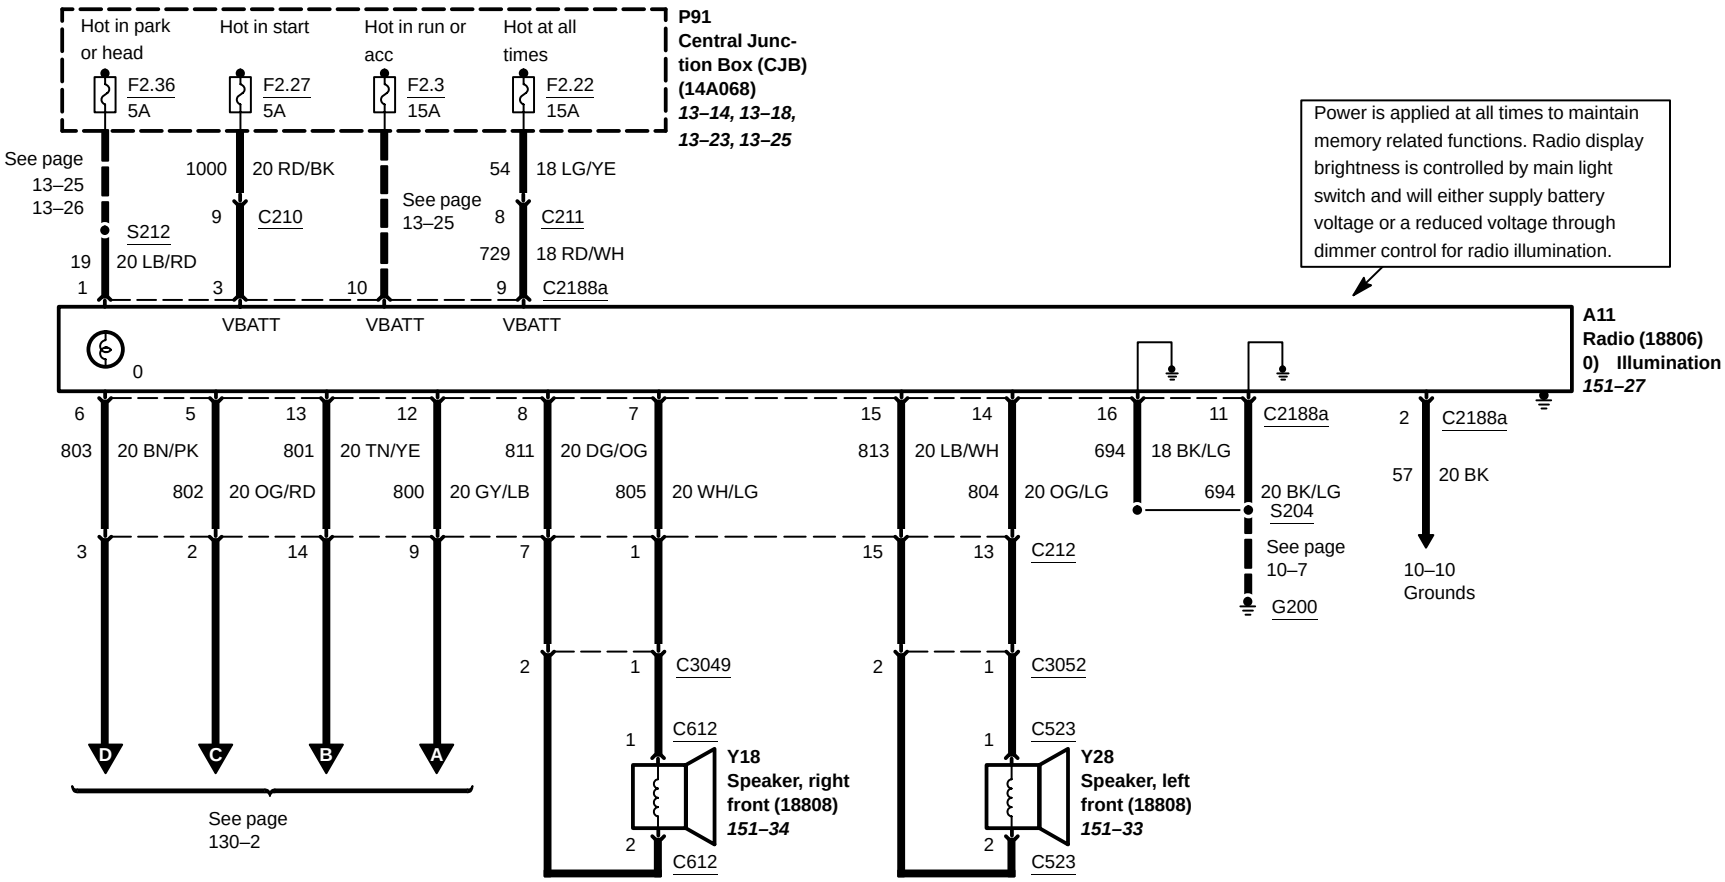
Hot in park or head
Hot in start
Hot in run or acc
Hot at all times
F2.36 5A
F2.27 5A
F2.3 15A
F2.22 15A
P91 Central Junction Box (CJB) (14A068) 13–14, 13–18, 13–23, 13–25
See page 13–25 13–26
See page 13–25
1000 20 RD/BK
54 18 LG/YE
9 C210
8 C211
S212
19 20 LB/RD
729 18 RD/WH
1 3 10 9 C2188a
VBATT VBATT VBATT
Power is applied at all times to maintain memory related functions. Radio display brightness is controlled by main light switch and will either supply battery voltage or a reduced voltage through dimmer control for radio illumination.
A11 Radio (18806) 0) Illumination 151–27
0
6 803 20 BN/PK
5 802 20 OG/RD
13 801 20 TN/YE
12 800 20 GY/LB
8 811 20 DG/OG
7 805 20 WH/LG
15 813 20 LB/WH
14 804 20 OG/LG
16 694 18 BK/LG
11 694 20 BK/LG
C2188a
S204
G200
See page 10–7
2 57 20 BK
C2188a
10–10 Grounds
3 2 14 9 7 1 C212
15 13 C212
2 1 C3049
2 1 C3052
1 C612
2 C612
1 C523
2 C523
Y18 Speaker, right front (18808) 151–34
Y28 Speaker, left front (18808) 151–33
D C B A
See page 130–2