C341c

14C719

A207a
Driver seat module
(14C708)

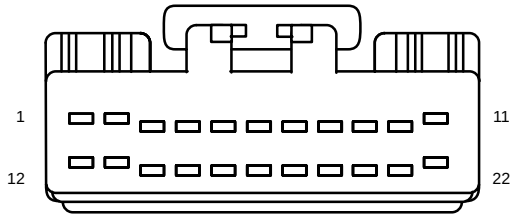

F22017

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	270 (BN/OG)	Memory set switch (14776)
4	–	not used
5	–	not used
6	–	not used
7	–	not used
8	–	not used
9	–	not used
10	–	not used
11	1203 (BK/LB)	Ground
12	566 (DG)	Voltage supplied at all times (overload protected)
13	272 (WH/OG)	Memory set switch (14776), Illumination, input
14	–	not used
15	268 (BK/OG)	Memory set switch (14776), position 2
16	267 (BN/LG)	Memory set switch (14776), position 1
17	–	not used
18	–	not used
19	–	not used
20	1000 (RD/BK)	Voltage supplied in Start (overload protected)
21	–	not used
22	70 (LB/WH)	ISO Bus

C341d

14C719

A207a
Driver seat module
(14C708)



F02375

Pin	Circuit	Circuit function
1	1205 (BK)	Ground
2	956 (OG/LG)	Voltage supplied at all times (overload protected)

C341e

14C719

A207a
Driver seat module (14C708)



F02032

Pin	Circuit	Circuit function
1	1205 (BK)	Ground
2	566 (DG)	Voltage supplied at all times (overload protected)