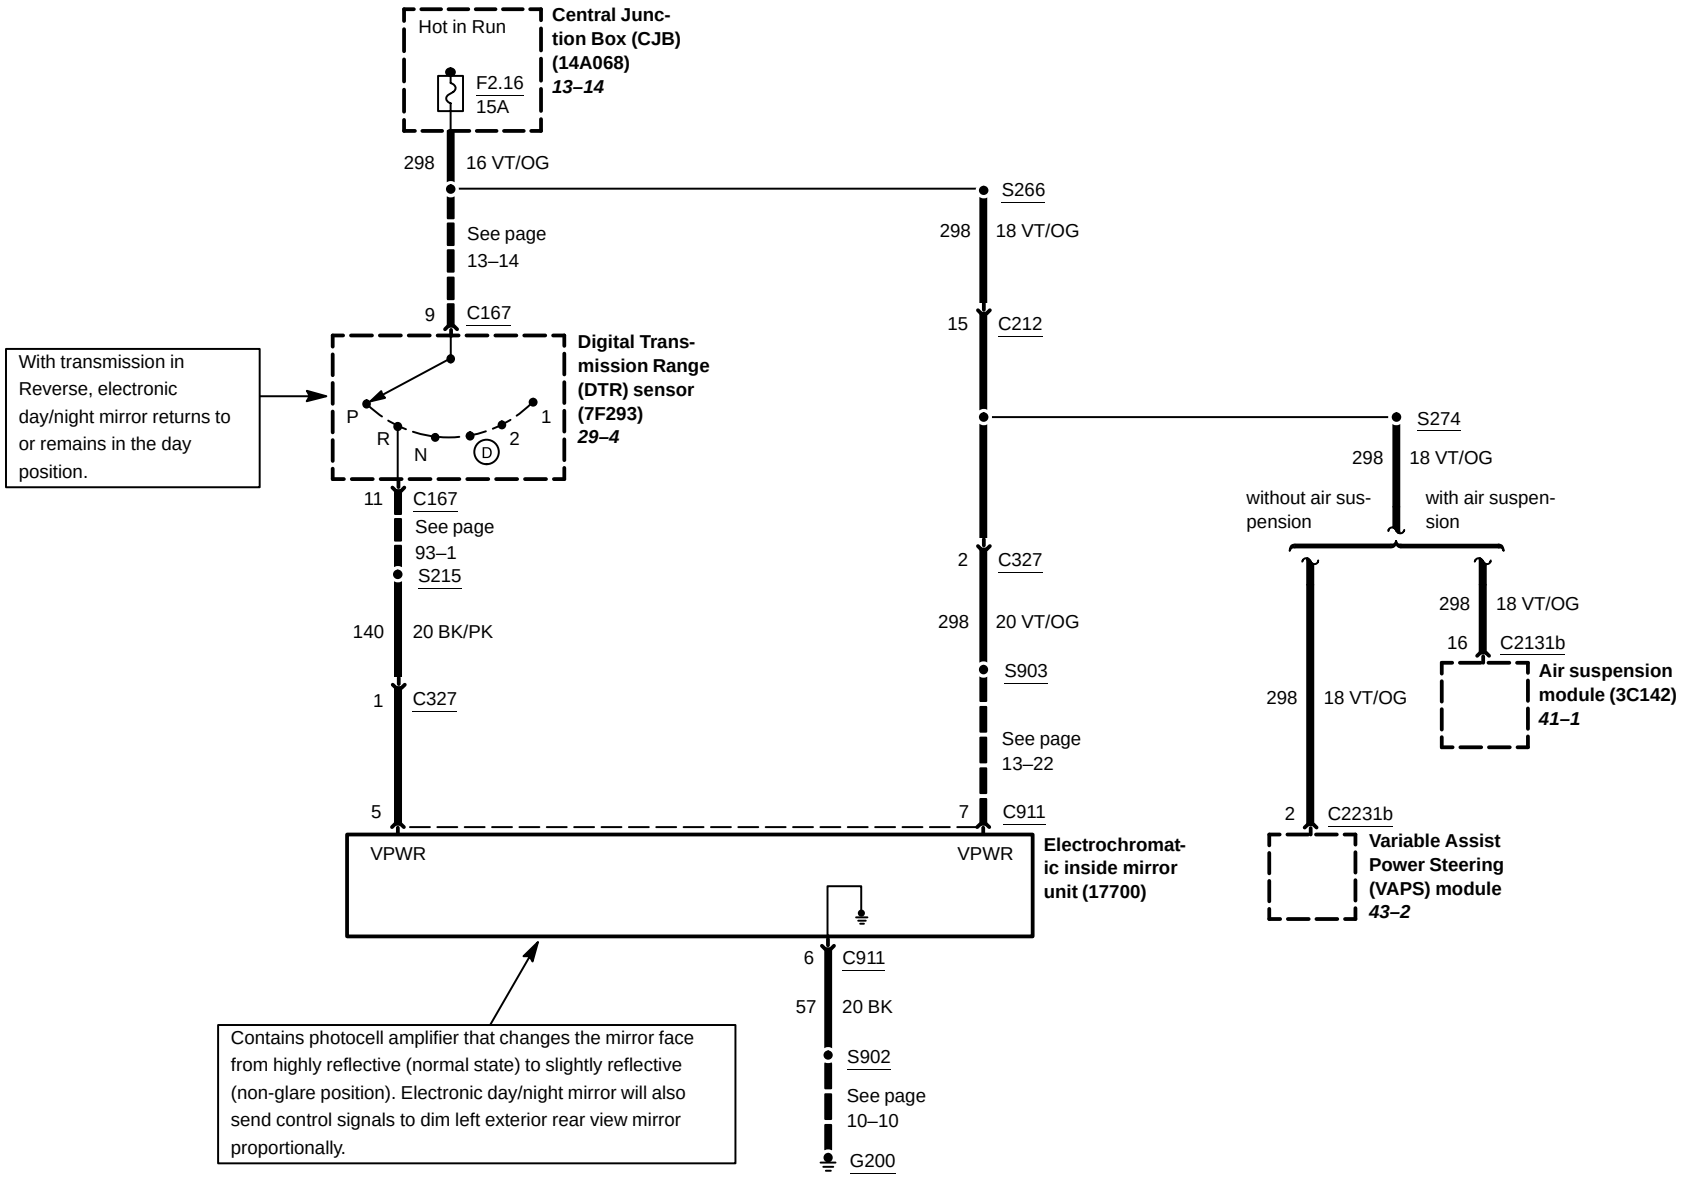
Hot in Run
Central Junction Box (CJB) (14A068) 13–14
F2.16
15A
298 16 VT/OG
See page 13–14
9 C167
With transmission in Reverse, electronic day/night mirror returns to or remains in the day position.
Digital Transmission Range (DTR) sensor (7F293) 29–4
P R N D 1 2
11 C167
See page 93–1
S215
140 20 BK/PK
1 C327
5
VPWR
S266
298 18 VT/OG
15 C212
S274
298 18 VT/OG
without air suspension
with air suspension
2 C327
298 20 VT/OG
S903
See page 13–22
7 C911
VPWR
Electrochromatic inside mirror unit (17700)
298 18 VT/OG
16 C2131b
Air suspension module (3C142) 41–1
298 18 VT/OG
2 C2231b
Variable Assist Power Steering (VAPS) module 43–2
6 C911
57 20 BK
S902
See page 10–10
G200
Contains photocell amplifier that changes the mirror face from highly reflective (normal state) to slightly reflective (non-glare position). Electronic day/night mirror will also send control signals to dim left exterior rear view mirror proportionally.