C1010

13A006

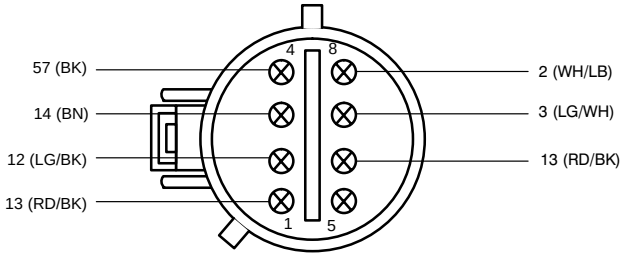

12A581

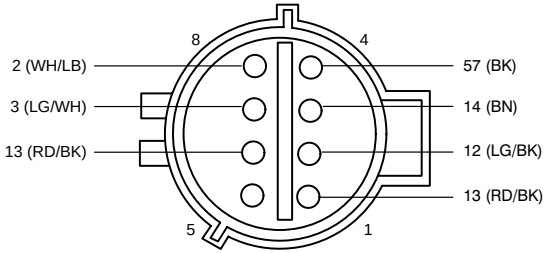

F08243

C1011

12A581

K73
Blower motor relay



F05147

Pin	Circuit	Circuit function
30	37 (YE)	Voltage supplied at all times (overload protected)
85	57 (BK)	Ground
86	753 (YE/RD)	Center console, Heater blower motor (19805), feed
87	515 (OG/RD)	Resistor, Blower motor, High
87A	–	not used

C1016

12A581

K163
PCM power relay



F05147

Pin	Circuit	Circuit function
30	37 (YE)	Voltage supplied at all times (overload protected)
85	16 (RD/LG)	Voltage supplied in Start and Run (overload protected)
86	570 (BK/WH)	Ground
87	361 (RD)	Voltage supplied in Start and Run (overload protected)
87A	–	not used

C1017a

10K304

K22
Starter relay (11450)



F01085

Pin	Circuit	Circuit function
1	290 (GY)	Electronic Automatic Temperature Control (EATC) module (19980), to, Fresh/recirculation door actuator (19E616)

C1017b

14300

K22
Starter relay (11450)

F01025

Pin	Circuit	Circuit function
1	2037	Battery cable +